

Choosing the product that best fulfils  
your needs.

## Apeos C3061 / C2561 / C2061

---

Customer Expectation Document

October 2024 – Version 1.0

CSO-FN-CED-409



# Contents

<b>What Does This Document mean to Me?</b>	5
<b>Product Overview</b>	5
The Apeos C3061/C2561/C2061	5
Safety Data Sheets	5
Compliance & Approvals	5
Monthly Print Volume Range	6
Responsibility Matrix	7
<b>Product Specifications</b>	8
Product Configuration Options	8
Product Features and Options	9
<b>Copier Specifications</b>	10
<b>Printer Specifications</b>	11
<b>Scan Specifications</b>	12
<b>Fax Specifications</b>	13
<b>Direct Fax Specifications</b>	13
<b>Internet Fax Specifications</b>	14
<b>IP Fax (SIP) Specifications</b>	14
<b>Duplex Automatic Document Feeder B1-C (3 Pass)</b>	14
<b>Duplex Automatic Document Feeder B4-PC (1 Pass)</b>	15
<b>Side Tray (Optional)</b>	15
<b>Finishing Options</b>	16
Finisher-A3	16
Finisher-B5 (Hybrid finisher with Staple free)	17
<b>Paper Tray Capacity</b>	18
<b>Output Tray Capacity</b>	18
<b>Duplex Function (Automatic Duplex)</b>	18
<b>Cost Recovery</b>	18
<b>Billing Meters</b>	19
<b>Scan Delivery Kit (Optional)</b>	19
<b>Features and Memory Configurations</b>	20
<b>Supported Paper Types</b>	21

Coated Stock .....	21
Label Stock .....	21
Pre-Printed Stock .....	21
Carbonless Stock .....	21
Envelopes .....	21
Storage .....	21
<b>Consumables &amp; Ordering .....</b>	<b>22</b>
<b>Customer Replaceable Units .....</b>	<b>22</b>
Drum Cartridge Yield Rate .....	22
Toner Cartridge Yield Rate .....	22
Waste Toner Bottle Yield Rate .....	22
Fusing unit (R8) Yield Rate .....	23
Transfer Belt Cleaner (R6) Yield Rate .....	23
Second Bias Transfer Roll (R7) unit Yield Rate .....	23
<b>Excess Consumables .....</b>	<b>23</b>
<b>Staple Cartridges .....</b>	<b>23</b>
<b>Accessories/Options .....</b>	<b>24</b>
<b>Product Performance .....</b>	<b>26</b>
Product Limitations .....	26
Image Alignment .....	26
Print Speeds and First Copy Output .....	26
Duplex Speed .....	26
Apeos C2061 Limitations .....	27
<b>Data capacity limitation .....</b>	28
Fax .....	29
Internet Fax, IP Fax (SIP) .....	29
Microsoft Universal Print .....	29
Printing from USB and camera media .....	30
Store to USB .....	30
Searchable PDF .....	30
Gesture UI .....	30
Printing from Mobile Devices (FBAU Print Utility) .....	31
Mopria .....	31
AirPrint .....	31
Wireless Network Kit .....	32
Printing using Wi-Fi Direct .....	32
Secondary Ethernet .....	33
Remote Operations Panel .....	33
<b>Installation Requirements .....</b>	<b>35</b>
General Installation Requirements .....	35
Delivery Restrictions .....	35

Temperature & Humidity.....	35
Electrical Requirements.....	35
<b>Machine Weight.....</b>	<b>36</b>
Machine Weight.....	36
<b>Machine Dimensions and Space Requirements (Minimum Service Clearance).....</b>	<b>36</b>
Apeos C2061 .....	37
Apeos C2561/C3061 .....	37
<b>Apeos 360 View.....</b>	<b>37</b>
<b>Support .....</b>	<b>38</b>
Customer Support .....	38
Customer Support Centre.....	38
Customer Training .....	38

# What Does This Document mean to Me?

The purpose of this document is to help you understand the performance, capabilities and recommended operating guidelines for the Apeos C3061/C2561/C2061 and to help you ensure that it is the right product for your business.

The specifications and data in this document are current at the time of publication and proprietary to FUJIFILM Business Innovation Australia Pty Ltd, also referred to hereon after in this document as FBAU. The customer should only circulate the document within their organization on a need-to-know basis & use all reasonable efforts to safeguard the document and to not disclose its contents to competitors of FUJIFILM Business Innovation Australia Pty Ltd or to other third parties.

This document may be periodically updated to incorporate changes in specifications and to correct any technical inaccuracies or typographic errors.

## Product Overview

### The Apeos C3061/C2561/C2061

Apeos C3061/C2561/C2061 is an A3 colour multifunction device providing Copy/ Print/ Scan/ Fax\* (\*Optional) with a copy/print speed of up to 30 pages per minute, high quality image at up to 1,200 x 2,400 dpi print resolution. The Apeos C3061 and C2561 devices support a single pass duplex automatic document feeder for scanning documents, mobile printing (AirPrint, Mopria), tap to print or scan functionality via NFC, and optional wireless connectivity.

If you have any further questions after reading this document, please contact your FBAU sales representative who will be happy to assist you.

### Safety Data Sheets

These documents can be obtained upon request by emailing: [shm-fbau-websupport@fujifilm.com](mailto:shm-fbau-websupport@fujifilm.com) or by contacting the FBAU Customer Support Centre on 1800 028 962, or via link on our external website: <https://www.fujifilm.com/fbau/en/support-and-drivers/safety-data-sheets>

### Compliance & Approvals

The approvals obtained in relation with environmental and safety considerations are as follows:

- Meets International ENERGY STAR Version 3.0 TEC criteria.
- Electromagnetic Compatibility Framework – Supplier's Declaration of Conformity for RCM mark (Australia).
- IEC60950-1 CB TEST CERTIFICATE.

## Monthly Print Volume Range

This product is designed for operation based on the following recommended monthly print volumes.

Description	Apeos		
	C3061	C2561	C2061
Minimum AMPV	4 K	3.5 K	3.0 K
Maximum AMPV	52 K	37 K	25 K
Duty Cycle	129 K	107 K	88 K
Machine Life	5 Years or 480K		
Rated Print Speed /ppm (BW / Colour)	30/30	25/25	20/20

**AMPV (Average Monthly Print Volume) Range:** Working outside this range may affect machine performance. If the device consistently operates at a higher AMPV than the maximum stated, the customer should consider the purchase of multiple devices or a device with a higher print volume capacity.

**Duty Cycle:** If the device is occasionally used outside of the AMPV range, printing should not exceed the duty cycle limit. Duty cycle represents the rated print volume capacity of the device for a given month (printed on recommended stock and assuming 8hrs per day, 20 days per month usage).

**Machine Life:** The manufacturer's print volume limit for reliable performance of the device for the machine's life.

**Rated Print Speed:** Pages printed per minute on A4 LEF stock, 80GSM.

## Responsibility Matrix

The Following table summarises customer and FBAU responsibilities relating to the product.

Action	Responsibility	
	Customer	FBAU
Installation Actions	<p>Please refer to the "Installation Services" Customer expectation document.</p>	✓
Ongoing Actions	Order and install staple and dry ink cartridges (depending on the device configuration) according to machine instructions	✓
	Remove, repair and re-install any failed components	✓*1
	Provide Helpline support (Customer Support Centre)	✓*1
	Provide spare parts	✓*1
	Provide service	✓*1
	Perform system software upgrades	✓*1
	Download any additional fonts to server	✓
	Install client software/ device drivers on PC/workstations	✓
	Back-up Customer unique settings (Address book, logs, user settings, mailbox data, etc.). This data is required should the machine HDD fail. Please refer to the Admin Guide for more information	✓
	Ensure adequate space and power to install device	✓

\*1: As per contractual requirements.

# Product Specifications

## Product Configuration Options

Feature / Accessory	Copier Printer Scanner		
	Apeos C3061	Apeos C2561	Apeos C2061
<b>System Memory 4GB*1</b>	✓	✓	✓
<b>SSD (256GB)</b>	✓	✓	N/A
<b>DADF (Single pass)</b>	✓	✓	N/A
<b>DADF (3 pass)</b>	N/A	N/A	✓
<b>7" Full User interface (UI)</b>	✓	✓	✓
<b>Standard 1 Tray module</b>	✓	✓	✓
<b>Additional 1 Tray module</b>	Option	Option	Option
<b>Additional 1 Tray with cabinet</b>	Option	Option	Option
<b>Additional 3 Tray module</b>	Option	Option	Option
<b>Exit 1 (Offset Output Tray)</b>	✓	✓	✓
<b>Exit 2 Tray (Inner Exit Tray)</b>	✓	✓	Option
<b>Duplex unit</b>	✓	✓	✓
<b>MSI</b>	✓	✓	✓
<b>Side Tray</b>	Option	Option	Option
<b>Wing Table</b>	Option	Option	Option
<b>A3-Finisher</b>	Option	Option	Option
<b>B5-Finisher</b>	Option	Option	Option
<b>Secondary Ethernet Kit</b>	Option	Option	Option
<b>Wireless Network Kit</b>	Option	Option	Option
<b>ICCR-B (Card reader)</b>	Option	Option	Option
<b>Initial Toner (Low yield)</b>	✓	✓	✓
<b>Initial standard life drum</b>	✓	✓	✓
<b>Power cord</b>	✓	✓	✓

## Product Features and Options

Description	Apeos C3061	Apeos C2561	Apeos C2061
<b>Copy</b>	✓	✓	✓
<b>EPC</b>	✓	✓	✓
<b>Annotation Copy</b>	✓	✓	N/A
<b>Print</b>	✓	✓	✓
<b>USB Media Print</b>	✓	✓	✓
<b>AirPrint / Mopria</b>	✓	✓	✓
<b>Adobe PostScript 3</b>	Option	Option	Option
<b>Fax</b>	Option	Option	Option
<b>Internet Fax</b>	Option	Option	Option
<b>Scan</b>	✓	✓	✓
<b>Thumbnail/Preview</b>	✓	✓	N/A
<b>Searchable PDF Kit</b>	Option	Option	Option
<b>High Compression Image</b>	✓	✓	✓
<b>Scan to e-mail</b>	✓	✓	✓
<b>Copy Management Expansion</b>	✓	✓	N/A
<b>HDD Data Overwrite<sup>*2</sup></b>	N/A	N/A	N/A
<b>Data encryption (AES 256)</b>	✓	✓	N/A
<b>Image Log</b>	Option	Option	N/A
<b>Scan to USB</b>	✓	✓	✓
<b>Remote Authentication (Kerberos, LDAP, SMB, Azure AD)</b>	✓	✓	N/A
<b>External Access</b>	✓	✓	N/A
<b>Scan to Word/Excel</b>	Option	Option	Option
<b>Scan Delivery<sup>*4</sup></b>	Option	Option	N/A

For additional options and further details refer to Accessories/Options section.

<sup>\*1</sup>: 4GB of shared memory.

<sup>\*2</sup>: Please refer to the Product Security White Paper for more details.

<sup>\*3</sup>: Data encryption function is equipped as standard. By factory default, data encryption is set to [Disable.] If you want to use encryption, it needs to be set to [Enable] on the system administrator screen.

<sup>\*4</sup>: The Scan Delivery Kit will be configured remotely, and as such, remote access to the customer's computer is required. If remote access is not available, then Scan Delivery Kit will need to be configured with an on-site analyst at standard service rates. Additional charges apply for installation of the Scan Delivery kit.

# Copier Specifications

Item	Description		
	C3061	C2561	C2061
Memory	4GB	4GB	4GB
HDD (SSD)	256 GB	256 GB	N/A
Scanning Resolution	600 x 600 dpi		
Printing Resolution	1200 x 2400 dpi		
Warm-up Time <sup>*1</sup>	26seconds or less (at room temperature 23 <sup>0</sup> C). 22 seconds or less when the main power is ON (at room temperature 23 <sup>0</sup> C).		
Recovery time from sleep mode	13.6 seconds or less (at room temperature 23 <sup>0</sup> C)	11 seconds or less (at room temperature 23 <sup>0</sup> C)	11 seconds or less (at room temperature 23 <sup>0</sup> C)
First Copy Output Time <sup>*2</sup>	<b>BW</b>	4.6 sec	5.9 sec
	<b>Colour</b>	6.0 sec	7.9 sec
Continuous Copy Speed (BW/Colour) PPM	<b>Simplex – PPM</b> <sup>*3</sup>		
	<b>A4 LEF/ B5 LEF</b>	30/30	25/25
	<b>A4SEF</b>	23/23	19/19
	<b>B5 SEF</b>	17/17	14/14
	<b>B4</b>	20/20	16/16
	<b>A3</b>	17/17	14/14
Original Paper Size	Max. 297x432mm (A3, 11x17") for both sheet original and book original.		
Copy Magnification Reduce/Enlarge)	Size-to-Size: 100% (1:1 ±0.7%). Pre-set: 50%, 70%, 81%, 86%, 115%, 122%, 141%, 200%. Variable: 25% to 400% (1% increments).		
Quantity Selector	Max. 999 sheets		
Output Tray Capacity <sup>*5</sup>	Upper Center: 250 sheets (A4 LEF), Lower Center: 250 sheets (A4 LEF)		400 sheets.
Power Supply	AC220-240 V +/- 10 %, 8 A, 50/60 Hz common.		

<sup>\*1</sup>: May change depending on usage conditions.

<sup>\*2</sup>: First Copy Output Time (FCOT) measured once fuser is at operating temperature.

<sup>\*3</sup>: With Finisher-B5 installed, the Duplex speed is reduced when printing to the center output tray.

<sup>\*4</sup>: Pages Per Minute in Simplex Mode and in Duplex Mode Images Page Minute.

<sup>\*5</sup>: 70 gsm.

# Printer Specifications

Item		
<b>Print Resolution</b>		1,200 ×2,400dpi.
<b>Continuous Print Speed</b> *1		Same as copy function.
<b>PDL</b>		PCL6, PCL5 (Standard), Adobe PostScript® 3™ (Option).
<b>Network Protocol</b>	<b>Ethernet (Standard)</b>	TCP/IP (lpd, IPP, Port9100).
<b>Emulation</b>		ESC/P-K (LQ1900K II), TIFF, JPEG, PDF, HP-GL (HP7586B), HP-GL2 / RTL (HP Design Jet 750C Plus), DocuWorks, PCL5 / 6 (HP Color Laser-Jet 5500), KSSM, KS5843, KS5895, XPS.
<b>Connectivity</b>	<b>Standard</b>	Ethernet 1000BASE-T / 100BASE-TX / 10BASE-T, USB3.0.
	<b>Optional</b>	Wireless LAN (IEEE 802.11 a / b / g / n / ac).
<b>Operating System Supported</b> *2	<b>PCL6</b>	Windows 11 (64 bit), Windows 10 (32/64 bit), Windows Server 2022 (64 bit), Windows Server 2019 (64 bit), Windows Server 2016 (64 bit).
	<b>Mac OS X-Driver</b>	macOS 14 / 13 / 12 / 11 / 10.15.
	<b>Adobe PostScript® 3™</b>	Windows 11 (64 bit), Windows 10 (32/64 bit), Windows Server 2022 (64 bit), Windows Server 2019 (64 bit), Windows Server 2016 (64 bit), macOS 14 / 13 / 12 / 11 / 10.15.
<b>Fonts</b>	<b>PCL</b>	European 83 type faces, Korean font 6 type faces, Chinese font 1 type face, Chinese Font (ShuSong), Korean Fonts (Myungjo, Gothic, Round Gothic, Graphic, Kungso, Saemul).
	<b>Adobe PostScript® 3™</b>	Japanese font 2 type faces, Japanese fonts (Heisei Mincho W3, Heisei Kaku Goshic W5).

\*1: The speed may be reduced due to the image quality adjustment. The printing speed may be reduced depending on the document.

\*2: Please refer to the FBAU website for the latest supported operating systems

# Scan Specifications

Item	Description		
<b>Type</b>	Colour Scanner.		
<b>Original Paper Size</b>	Same as the Copy function.		
<b>Scanning Resolution</b>	600 x 600dpi, 400 x 400dpi, 300 x 300dpi, 200 x 200dpi.		
<b>Scanning Speed<sup>*1</sup></b>	<b>Single Pass DADF B4-PC 130 sheets</b>	B/W: 80 ppm, Colour: 80 ppm (1 pass, 2 sided scanning: B/W 80 ppm, Colour 80 ppm) (FBAU Standard Document (A4 LEF), 200 dpi, to Folder).	
	<b>3 Pass DADF B1-PC 110 sheets</b>	BW: 55 ppm, Colour: 55 ppm (Simplex) (FBAU Standard Document, A4LEF, 200dpi, store to folder).	
<b>Connectivity</b>	<b>Standard</b>	Ethernet 1000BASE-T / 100BASE-TX / 10BASE-T.	
	<b>Optional</b>	Wireless Lan IEEE802.11 a / b / g / n / ac.	
<b>Store to Folder</b>	<b>Protocol</b>	TCP/IP (WebDAV, HTTP).	
	<b>File Format</b>	Monochrome binary	TIFF, DocuWorks <sup>*2</sup> , PDF <sup>*2</sup>
		Grayscale	TIFF, JPEG <sup>*3</sup> , DocuWorks <sup>*2</sup> , PDF <sup>*2</sup>
		Full Colour	TIFF, JPEG, DocuWorks <sup>*2</sup> , PDF <sup>*2</sup> , High Compression PDF <sup>*2</sup>
	<b>Driver</b>	TWAIN	
<b>Scan to PC</b>	<b>Protocol</b>	TCP/IP (SMB,FTP, SFTP)	
	<b>Operating System<sup>*4</sup></b>	Windows 11 (64 bit), Windows 10 (32/64 bit), Windows Server 2022 (64 bit), Windows Server 2019 (64 bit), Windows Server 2016 (64 bit). macOS 14 <sup>*5</sup> / 13 <sup>*5</sup> / 12 <sup>*5</sup> / 11 <sup>*5</sup> / 10.15.	
	<b>File Format</b>	Monochrome binary	TIFF, DocuWorks, PDF
		Grayscale	TIFF, JPEG, DocuWorks <sup>*2</sup> , PDF <sup>*2</sup> , Highly Compressed PDF <sup>*2</sup>
		Full Colour	TIFF, JPEG, DocuWorks <sup>*2</sup> , PDF <sup>*2</sup> , Highly Compressed PDF <sup>*2</sup>
<b>Scan to e-mail</b>	<b>Protocol</b>	TCP/IP(SMTP)	
	<b>File Format</b>	Monochrome binary	TIFF, DocuWorks, PDF
		Grayscale	TIFF, JPEG, DocuWorks <sup>*2</sup> , PDF <sup>*2</sup> , XPS <sup>*2</sup> , Highly Compressed PDF <sup>*2</sup>
		Full Colour	TIFF, JPEG, DocuWorks <sup>*2</sup> , PDF <sup>*2</sup> , Highly Compressed PDF <sup>*2</sup> , Microsoft Word documents <sup>*7</sup> , Microsoft Excel documents <sup>*7</sup>

<sup>\*1</sup>: Scanning speed varies according to the document. The 3 pass DADF is standard on Apeos C2061 only, it is not available for Apeos C2561/C3061 models.

<sup>\*2</sup>: When CentreWare Internet Services is used.

<sup>\*3</sup>: When Network Scanner Utility 3 is used.

<sup>\*4</sup>: Please refer to the FBAU web site for the latest information of the compliant OS

<sup>\*5</sup>: Only SMB is supported.

# Fax Specifications

Item		Description
<b>Send Document Size</b>		Max: A3, 11x17", Long document (Max. 600mm)
<b>Recording Paper Size</b>		Max: A3, 11x17", Min: A5
<b>Transmission Time</b>		2 seconds and more but fewer than 3 seconds <sup>*1</sup>
<b>Transmission Mode</b>		ITU-T G3
<b>Scanning Resolution</b>	<b>Standard</b>	8 x 3.85 lines/mm, 200 x 100dpi (7.9 x 3.9 dots/mm)
	<b>Fine</b>	8 x 7.7 lines/mm, 200 x 200dpi (7.9 x 7.9 dots/mm)
	<b>Super Fine</b>	16 x 15.4 line/mm, 400 x 400dpi (15.7 x 15.7 dots/mm) 600 x 600dpi (23.6 x 23.6 dots/mm)
<b>Coding Method</b>		MH, MR, MMR, JBIG
<b>Transmission Speed</b>		G3: 33.6/31.2/28.8/26.4/24.0/21.6/19.2/16.8/14.4/12.0/9.6/7.2/4.8/2.4 kbps
<b>Fax Lines<sup>*2</sup></b>		Telephone subscriber line, PBX, fax communication (PSTN), maximum 1 port <sup>*3</sup>

<sup>\*1</sup>: When A4 size document with approximately 700 characters is transmitted in standard image-quality (8 x 3.85 lines/mm) and in high-speed mode (28.8kbps or faster, JBIG). Only indicates the time for transmitting the image information and does not include the communication control time. The total communication time will vary depending on the contents of the document, the type of machine receiving the fax, and line condition.

<sup>\*2</sup>: Only UNI-V ports are supported for fax transmissions on our devices when connected to the NBN. For more information please contact your Internet Service Provider.

<sup>\*3</sup>: Number of fax lines is 1 port. Port refers to number of channels for FAX.

# Direct Fax Specifications

Item		Description
<b>Document Size</b>		A3, B4, A4
<b>Transmission Resolution</b>	<b>Standard</b>	200 x 100dpi (7.9×3.9 dots/mm)
	<b>Fine</b>	200 x 200dpi (.9×7.9 dots/mm)
	<b>Super Fine</b>	400x 400dpi (15.7×15.7 dots/mm), 600x 600dpi (23.6×23.6 dots/mm)
<b>Applicable Lines</b>		Same as the fax function
<b>Operating System<sup>*1</sup></b>		<p><b>[PCL Driver]</b> Windows 11 (64 bit), Windows 10 (64 bit), Windows Server 2019 (64 bit), Windows 10 (32 bit), Windows Server 2022 (64 bit), Windows Server 2016 (64 bit)</p> <p><b>[Mac OS X Driver]</b> macOS 14 / 13 / 12 / 11 / 10.15</p>

<sup>\*1</sup>: Please refer to our official website for the latest supported OS.

Link: [FUJIFILM Business Innovation Support & Drivers](#)

## Internet Fax Specifications

Item		Description
<b>Document Size</b>		A3, B4, A4
<b>Scanning Resolution</b>		Same as the fax function
<b>Output Format</b>		Format: TIFF-FX, Compression Method: MH, MMR, JBIG
<b>Profile</b>		TIFF-S, TIFF-F, TIFF-J
<b>Protocol</b>		Send: SMTP, Receive: SMTP, POP3
<b>Connectivity</b>	<b>Standard</b>	Ethernet 1000BASE-T/100BASE-TX/10BASE-T

## IP Fax (SIP) Specifications

Item		Description
<b>Document Size</b>		Same as the fax function
<b>Scanning Resolution</b>		Same as the fax function
<b>Protocol</b>		SIP, JT-T.38
<b>Coding Method</b>		Same as the fax function
<b>Connectivity</b>	<b>Standard</b>	Ethernet 1000BASE-T/100BASE-TX/10BASE-T
	<b>Optional</b>	Wireless LAN (IEEE802.11 a / b / g / n / ac)

## Duplex Automatic Document Feeder B1-C (3 Pass)

Item		Description
		<b>Apeos C2061</b>
<b>Type</b>		Duplex Automatic Document Feeder
<b>Original Paper Size</b>		Max: A3, 11 x 17", Min: A5 <sup>*1</sup>
<b>Original Paper Weight</b>		38 -128gsm (Duplex: 50-128gsm)
<b>Capacity<sup>*2</sup></b>		110 sheets
<b>Feeding Speed Copy (BW/Colour)</b>		20 ppm / 20 ppm
<b>Feeding Speed Scan (BW/Colour)</b>		55 ppm / 55 ppm

<sup>\*1</sup>: 125 x 85 mm for non-standard paper size.

<sup>\*2</sup>: 64gsm paper

## Duplex Automatic Document Feeder B4-PC (1 Pass)

Item	Description	
	C3061	C2561
Type	Single Pass (Duplex Automatic Document Feeder)	
Original Paper Size	Max: A3, 11 x 17", Min: A6*1	
Original Paper Weight	38 -128gsm (Duplex: 50-128gsm) *2	
Capacity*3	130 sheets	
Copy Feeding Speed (BW/Colour)	30/30 ppm	25/25 ppm
Scan Feeding Speed (BW/Colour)	B/W: 80 ppm, Colour:80 ppm (1 pass, 2-sided scanning: B/W 80 ppm, Colour 80 ppm) (Standard Paper (A4 LEF), 200 dpi, to Folder.)	

\*1: The minimum custom size is 49 x 85 mm.

\*2: Custom sizes from 49 x 85 mm to 55 x 91 mm are available from 38 to 209 gsm.

\*3: 70 gsm paper.

\*4: The scanning speed varies depending on the documents.

## Side Tray (Optional)

Item	Description
Paper Size	Same as the Basic Specifications / Copy Function
Paper Weight	52 to 300 gsm
Paper Capacity*1	100 sheets
Dimensions	W 328 x D 540 x H 198 mm

\*1: 70 gsm paper.

# Finishing Options

## Finisher-A3

Item	Description	
Type	Sorting (Offset available) / Stacking (Offset available)	
Paper Size	Center Tray: A4, A3 Finisher tray: Max: A3, 11 x 17", Min: A6, Postcards (100 x 148 mm) Custom Size: 89 x 98 mm to 297 x 432 mm	
Paper Weight	Center Tray: 52 - 300 gsm Finisher tray: 52 - 256	
Stacker Capacity <sup>*1</sup>	Center Tray	A4 LEF: 125 sheets A4 SEF A3: 50 sheets
	Finisher Tray	[Without Staples]   A4: 500 Sheets, B4: 250 Sheets, A3 or larger: 200 Sheets, Mixed Size Stacking <sup>*2</sup> : 250 Sheets, [With Staples] 30 Sets
Staple	Capacity	A4: 50 Sheets (Max 90gsm), B4 or larger: 30 Sheets (Max 90gsm)
	Paper Size	Max: A3, 11 x 17"; Min: JIS B5 LEF Custom Size: 203×182 mm~297×432 mm
	Position	Single (Front/Angled Staple) / Dual staple
	Paper weight	52 – 256 gsm
Dimensions / Weight	W 465 <sup>*3</sup> x D 484 x H 248 mm, 10 kg	

<sup>\*1</sup>: 70 gsm paper.

<sup>\*2</sup>: When larger size sheets are stacked on top of smaller size sheets.

<sup>\*3</sup>: Width 552.3 mm when extension tray 1 is extended, 633.5 mm when extension tray 2 is extended.

## Finisher-B5 (Hybrid finisher with Staple free)

Item		Description
Type	Finisher Tray	Sorting (Offset available)/ Stacking (Offset available)
Paper Size <sup>*1</sup>		Max: A3, 11 x17", Custom Size: 148 x 148 mm to 297 x 432 mm Min: A5
Paper Weight		52 – 300 gsm (Centre tray / Finishing tray)
Stacker Capacity <sup>*2</sup>	Capacity	[Without Staple] A4: 2,000 Sheets, B4: 1,000 Sheets, Mixed Size Stacking <sup>*3</sup> : 300 Sheets. [With Staples] A4: 100 Sets or 1,000 Sheets <sup>*4</sup> , B4 or larger: 75 Sets or 750 Sheets [With Booklet Finishing] <sup>*5</sup> 50 Sets or 600 Sheets [With Scoring] <sup>*5</sup> 500 Sheets
	Paper Size	Max: A3, 11 x 17", Min: A5LEF <sup>*2</sup>
	Position	Single (Front/Angled, Back/Straight), Dual (Parallel)
	Weight	Staple: 60 to 256 gsm, Staple-free Staple <sup>*7</sup> : 64 to 105 gsm
Punch <sup>*6</sup> (Option)	Paper Size	A3, 11x 17", B4, A4, A4SEF, Letter <sup>*7P</sup> (8.5 x 11"), Letter (8.5 x 11") LEF, B5 LEF, A5, A5LEF
	Number of Holes	2/4 Holes (Option)
	Paper Weight	52 - 220gsm
Booklet Finishing <sup>*5</sup>	Capacity	Booklet: 15 Sheets, Fold: 5 Sheets
	Paper Size	Max: A3, 11 x 17", Min: A4, Letter (8.5 x 11")
	Paper Weight	Saddle-Stapling: 64 - 80gsm, Half-Folding: 64 - 105gsm (Cover sheet up to 220gm)
Dimensions		W 618 x D 653 x H 1,047 mm With Booklet Maker Unit: W 618 x D 673 x H 1,076 mm
Weight		28 kg. Punch Module: + 2 kg, Booklet Maker Unit: +10kg

<sup>\*1</sup>: Paper in the sizes larger than A3 or 11 x 17" or smaller than B5 are delivered to the Centre Tray.

<sup>\*2</sup>: 70 gsm paper

<sup>\*3</sup>: When larger size sheets are stacked on top of smaller size sheets.

<sup>\*4</sup>: 75 sets or 750 sheets with dual stapling.

<sup>\*5</sup>: The Booklet Finishing function requires the optional Finisher B5 Booklet Maker unit (EC104194). After a job with the Booklet Finishing function specified has been output, the next job may not be delivered until the sheets are removed from the output tray. Also, if larger size sheets are stacked on top of smaller size sheets after a job with the Booklet Finishing function specified has been run, the next job may not be delivered until the sheets are removed from the output tray.

<sup>\*6</sup>: The Punch function requires the optional Finisher-B5 Punch unit for 2-hole / 4-hole punch.

<sup>\*7</sup>: Staple-free stapling does not have binding force equal to stapled stapling. Bound part may be easily separated depending on the paper, temperature, humidity, and how the page is turned over.

## Paper Tray Capacity

Input Tray	Paper Capacity (80gsm)	Paper Weight	Minimum/Maximum Size (Regular Size)
Tray 1 (Standard)*1	520 sheets	52-300 gsm	Max: A3, 11 x 17"; Min: A5 SEF Custom Size: 140 x 182 mm to 297 x 432 mm
Additional Tray (2) *1	520 sheets	52-300 gsm	Max: A3, 11 x 17"; Min: A5 SEF Custom Size: 140 x 182 mm to 297 x 432 mm
Tray 2 With Cabinet*1	520 sheets	52-300 gsm	Max: A3, 11 x 17"; Min: A5 SEF Custom Size: 140 x 182 mm to 297 x 432 mm
Tray's 2, 3, 4 (3 Tray Module) *1	Tray 2: 520 sheets Tray 3: 520 sheets Tray 4: 520 sheets	52-300 gsm	Max: A3, 11 x 17"; Min: A5 SEF Custom Size: 140 x 182 mm to 297 x 432 mm
Tray 5 (Bypass Tray) *1	96 sheets	52-300 gsm	Max: A3, 11 x 17"; Min: A5 SEF Custom Size: 140 x 182 mm to 297 x 432 mm

\*1: When using standard paper 80gsm

## Output Tray Capacity

Output Tray	Paper Capacity (80gsm)	Paper Weight	Paper Size
Exit 2 Tray	250 sheets	52 -300 gsm	Max: A3, 11 x 17"; Min: A5 SEF Custom Size: 140 x 182 mm to 297 x 432 mm
Lower Centre Tray	250 sheets	52 -300 gsm	Max: A3, 11 x 17"; Min: A5 SEF Custom Size: 140 x 182 mm to 297 x 432 mm
Side Tray (Optional)	100 sheets	52 -300 gsm	Max: A3, 11 x 17", Min: A5 SEF, Envelope*, Postcard (100 x 148 mm) Custom Size: 89 x 98 mm to 297 x 1,200 mm

## Duplex Function (Automatic Duplex)

Item	Description
Paper size	Max: A3, 11 x 17", Min: A5 SEF Custom Size: 128 x 140 mm to 297 x 432 mm
Paper weight*1	52 to 256 gsm

\*1: It is recommended to use Fujifilm recommended paper. Correct print output may not be possible depending on the requirement. Coated stock is not supported media type for automatic duplex, it is recommended to use manual duplex for best results.

## Cost Recovery

An EPSV (Electronic Partnership SuperVisor) Kit is required to interface between the machine and external cost recovery devices. The EPSV translates machine activity into readable pulses for the external device to debit the relevant account.

**Limitations:** Either the internal Auditron or External third-party device (via EPSV) may be used for authentication, but not concurrently. Please consult your FBAU sales representative on the pre-requisites for cost-recovery solutions.

# Billing Meters

For customers who have a current support services agreement with FBAU, an automated meter capture service is available provided the customer's devices and networks are compatible with FBAU meter capture technology. This service assists customers with convenient, accurate billing by eliminating the need for manual meter read submission for each device.

If your device or network is not compatible with our meter capture technology, you will be required to manually submit your meter readings for billing purposes. The billing counters can be viewed on the control panel display screen.

Item	Description
Meter 1	<b>Total Colour Impressions:</b> Provides the total output for all colour copies/prints, regardless of paper size (includes Meter 3). Up to 7-digit meter.
Meter 2	<b>Total Black Impressions:</b> Provides the total output for all black & white copies/prints/faxes (received), regardless of paper size. Up to 7-digit meter.
Meter 3	<b>Total Colour Large Impressions:</b> Provides the total output for all large-size (279mm x 400mm or larger) colour copies/prints. Up to 7-digit meter.
Meter 4	<b>Total Impressions:</b> Combined total copy/print/fax output for Meters 1 and 2. Up to 7-digit meter.

## Scan Delivery Kit (Optional)

Scan Delivery is an easy solution that provides the following features:

- Pre-set a button on the Control Panel to allow user to scan, store documents with a file format and send to destinations easily.
- File names can be customized on a PC combined with the document type and date, which provide easier search for documents.

To configure this kit remote access to the customer's computer is required. As such, Admin access must be provided during installation. Alternatively, availability of an IT Admin to support install is also possible.

As part of the configuration process for SMB/FTP server destinations, the following are required:

- Pre-configured destination folders with correct write permission by IT/Network Administrator\*1.
- SMB or FTP OS services must be enabled by IT/Network Administrator for scanning to locally hosted folders
- User ID and Password of accounts which are used in Scan Delivery should not expire, if the customer's policy is set to expire, it is the customer's responsibility to manage/maintain user credentials used for Scan Delivery.

\*Please note that troubleshooting or creating new shared folders on customer's server is out of scope of this process.

- If FBAU is not permitted to remotely access the customers' computer, the optional onsite analyst is available to purchase.

# Features and Memory Configurations

Features		Required Options	
		Apeos C3061/C2561	Apeos C2061
Copy	<b>Electronic Sorting</b>	Provided as standard	Provided as standard
	<b>Booklet Creation</b>	Provided as standard	N/A
	<b>Cover Insertion/Build Job</b>	Provided as standard	N/A
	<b>Annotation</b>	Provided as standard	N/A
Print	<b>Adobe PostScript</b>	Adobe PostScript Kit	Adobe PostScript Kit
	<b>Media print –Text/Photos</b>	Provided as standard	Provided as standard
	<b>Secure Print/Sample Print</b>	Provided as standard	N/A
	<b>Mailbox Print</b>	Provided as standard	N/A
	<b>Mopria Print</b>	Provided as standard	Provided as standard
	<b>AirPrint</b>	Provided as standard	Provided as standard
Scan	<b>Scan to PC/Scan to Mailbox</b>	Provided as standard	Limited
	<b>Scan to E-mail</b>	Provided as standard	Provided as standard
	<b>Scan to USB</b>	Provided as standard	Provided as standard
	<b>Image Compression</b>	Provided as standard	Provided as standard
	<b>Searchable PDF</b>	Searchable PDF Kit	Searchable PDF Kit
	<b>Scan to Word/Excel</b>	Searchable PDF Kit	Searchable PDF Kit
Fax	<b>Fax</b>	Fax Kit	Fax Kit
	<b>Direct Fax</b>	Fax Kit	Fax Kit
	<b>Internet Fax</b>	Fax Kit	Fax Kit
	<b>IP Fax (SIP)</b>	IP Fax (SIP) Kit	IP Fax (SIP) Kit
Other	<b>Thumbnail View</b>	Provided as standard	N/A
	<b>Data Encryption</b>	Provided as standard	Provided as standard
	<b>Image Log</b>	Image Log Kit	N/A
	<b>Data Overwrite</b>	N/A	N/A
	<b>Secure Watermark</b>	N/A	N/A

# Supported Paper Types

Every effort has been made to ensure that the Apeos C3061/ C2561/ C2061 Models support a broad range of media. Using only FBAU-recommended media maximizes reliability and paper-handling performance.

## Important

- Refer to the Product Reference Guide, Chapter 2 “Paper and Other Media” for further information regarding supported paper types.
- Printing with a different type and size of paper from the paper specified for the printer driver, or printing from a tray not supporting the loaded paper, can result in paper jams.

## Coated Stock

- Non-FBAU Coated papers are predominantly designed for use in offset equipment and when used in Xerographic equipment may cause miss feeds, skewing, and streaks. Coated stock can be automatically duplexed or finished and can be fed from the bypass tray however we cannot guarantee the devices performance when using coated media.

## Label Stock

- Labels stock can be fed from bypass tray but cannot be reused.

## Pre-Printed Stock

- Stock produced by an offset printer may cause jamming due to the drying agent used to improve drying time.
- Stock which has been produced by digital devices may cause bleeding due to the low melting point of modern toner materials used to create the pre-printed stock.

## Carbonless Stock

- Carbonless stock is prohibited due to its properties and causing contamination of internal components and paper path.

## Envelopes

- Successful envelope printing is highly dependent on the quality and construction of the envelopes. However, performance cannot be guaranteed. The pressure and heat of the fuser may cause some degree of creasing or wrinkling on envelopes. Although there is no recommended envelope media, it is advised to use envelopes made specifically for laser printers. Do not use envelopes with windows or clasps.
- Can print on envelopes up 75-90gsm.

## Storage

- The recommended storage conditions for all paper supplies are 20°C to 23°C at 45%-55% relative humidity. Papers stored or used outside the recommended environment are likely to affect the image quality output. Paper should always be stored in sealed packs, on shelves located in a workplace that is consistently controlled at the recommended environment stated above.

# Consumables & Ordering

Consumables including Toner can be ordered by contacting the FBAU Customer Support Centre by ordering on the Internet: <https://www.fujifilm.com/fbau/supplies>.

For the purpose of calculating the Toner Cartridge Yield Rate, the Waste Toner Bottle Yield Rate and the Drum Cartridge Yield Rate, an impression means the production of a one-sided (Simplex) print or copy on A4 (or smaller) size paper or A4 equivalent. A two-sided (Duplex) print or copy on A4 (or smaller) size paper or a Simplex print or copy on A3 size paper, shall be considered 2 impressions. A Duplex print or copy on A3 size paper shall be considered 4 impressions. Anything larger than A3 size paper shall be calculated as multiples of A4 size.

## Customer Replaceable Units

### Drum Cartridge Yield Rate

The life of the drum cartridge is based on A4 LEF size paper.

Item	Part Number	Mode	Life (impressions)	Replaced By	
			C3061 / C2561 / C2061		
<b>Number of pages copied at one time</b>		2		Customer	
Drum Cartridge	CT351438	BW <sup>*1</sup>	73,400 <sup>*3</sup>		
		Colour <sup>*2</sup>			

<sup>\*1</sup>: Number of capable copy pages per drum cartridge under BW Mode. When BW copy made under Automatic Colour Selection (ACS) mode, CMY drums are also consumed. The level of CMY consumption under ACS mode is dependent on the mix of Colour and BW on the output.

<sup>\*2</sup>: Number of capable copy pages per 4 drum cartridges under ACS mode

<sup>\*3</sup>: For the purposes of excessive drum usage, the stated cartridge yield will be utilised for calculation.

### Toner Cartridge Yield Rate

The yield of the toner cartridge is based on A4 LEF size paper at 5% area coverage per colour.

Item	Part Number	Yield	Replaced By
Toner Cartridge BLACK (K)	CT204249	36,000 impressions	Customer
Toner Cartridge CYAN (C)	CT204250	21,000 impressions	Customer
Toner Cartridge MAGENTA (M)	CT204251	21,000 impressions	Customer
Toner Cartridge YELLOW (Y)	CT204252	21,000 impressions	Customer

Machine is shipped with one set of starter toner cartridges with average yield of 18,000 (K) / 10,000 (CMY)

### Waste Toner Bottle Yield Rate

The life of the waste toner bottle differs according to engine speed, print paper size, image type, as well as density. The following information is based on A4 LEF size paper @ 5% area coverage.

Item	Part Number	Life (impressions)	Replaced By
		C3061 / C2561 / C2061	
Waste Toner Bottle	CWAA1118	55,000 impressions	Customer

## Fusing unit (R8) Yield Rate

The life of the Fusing unit is based on A4 LEF or equivalent.

Item	Part Number	Life (impressions)	Replaced By
		C3061 / C2561 / C2061	
Fusing unit	CWAA1113	100,000 impressions	Customer

## Transfer Belt Cleaner (R6) Yield Rate

The life of the Transfer Belt Cleaner unit is based on A4 LEF or equivalent.

Item	Part Number	Life (impressions)	Replaced By
		C3061 / C2561 / C2061	
Transfer Belt Cleaner	CWAA114	200,000 impressions	Customer

## Second Bias Transfer Roll (R7) unit Yield Rate

The life of the Second Bias Transfer Roll is based on A4 LEF or equivalent.

Item	Part Number	Life (impressions)	Replaced By
		C3061 / C2561 / C2061	
Transfer Roll	CWAA1115	200,000 impressions	Customer

## Excess Consumables

For customers with a contract with FBAU which includes the supply of consumables, consumables used by the customer in excess of the rate of usage specified in this CED are considered excess consumables. Subject to any process set out in your FBAU contract, excess consumables must be paid for at the rates set out on the FBAU Supplies website <https://supplies-fbau.fujifilm.com> at the time the excess consumables were supplied (unless different pricing has been agreed in writing between FBAU and the Customer with respect to such excess consumables). Consumables usage is calculated per device.

## Staple Cartridges

Staples are not considered consumables and are chargeable. Staples can be ordered at the prices set out at: <https://supplies-fbau.fujifilm.com/userHome.do>

Item	Part Number	Life	Replaced By
50 Sheet Staple Cartridge for Finisher- A3/B5* <sup>1</sup>	CWAA0856	5,000 staples (2 per box)	Customer
50 Sheet Staple Cartridge for Finisher-B5 Booklet* <sup>2</sup>	CWAA0728	2,000 staples (4 per box)	Customer

<sup>1</sup>: For Single and Dual Stapling on Finisher-A3, Finisher-B5.

<sup>2</sup>: For Saddle Stapling on Finisher-B5 with Booklet Maker only

# Accessories/Options

Special Order Equipment refers to equipment that FBAU does not typically hold in stock and may take up to 120 days for delivery from the date the customer signs and returns the document. Orders, including both standard and Special Order Equipment, are expected to be delivered within 60 days for standard items; however, Special Order Equipment may take up to 120 days for delivery. If we anticipate it could take longer than 120 days, FBAU will notify the customer of the timeframe which, where agreed by the customer, will be noted in an Appendix to the contract.

Part Number	Description	Notes
<b>Tray Modules</b>		
EC105008	<b>1 Tray Module</b>	Additional tray for desktop configuration. <b>This item is Special Order Equipment.</b>
EC105009	<b>1 Tray Module with Cabinet</b>	1 additional tray with a cabinet to convert MFD to floor standing. <b>This item is Special Order Equipment.</b>
EC105002	<b>3 Tray Module</b>	3 extra trays to convert MFD to floor standing.
<b>Finishers and Feeders</b>		
EC105010	<b>Exit 2 tray</b>	Optional center tray for Apeos C2061 only. <b>This item is Special Order Equipment.</b>
QC100256	<b>Finisher A3</b>	Inner finisher. Stores up to 500 sheets and creates 50 sheets stapling in 1 position. <b>Exit 2 Tray and Finishing cannot be installed together.</b>
QC100257	<b>Finisher B5<sup>**</sup></b>	Stores up to 2,000 sheets. Up to 50 sheets stapling and Staple Free <b>Exit 2 Tray and finishing cannot be used together.</b> <b>Requires 1 Tray Module with Cabinet OR 3 Tray Module.</b> <b>(Requires B5- Finisher Installation kit – EC105012)</b>
EC105012	<b>Finisher B5 – Installation Kit</b>	Mandatory cover for finisher installation.
EC104194	<b>Finisher-B5 Booklet Maker Unit</b>	Enables booklet finishing, saddle stapling and bi-folding. <b>Finisher-B5 is required. Hole Punch optional.</b>
EC104195	<b>2/4 Hole Punch Kit for Finisher-B5</b>	2 or 4 Hole punch feature. <b>Finisher-B5 is required. Only one Hole Punch kit can be installed.</b>
EC105014	<b>Long paper Inserter</b>	Supported skew prevention for long paper. (Up to 297mm x 1200mm) <b>This item is Special Order Equipment.</b>
<b>Fax</b>		
EC105005	<b>Fax Kit</b>	Comes with one line. Standard G3 FAX, Paperless Fax, Mailbox, Address Book, Direct FAX., Internet FAX, Internet FAX Direct.
EC104998	<b>IP Fax (SIP) Kit</b>	Enables Fax Transmission via VoIP server and IP-Fax Transmission to another IP-Fax (SIP) enabled device.
<b>Other Accessories</b>		
EC104993	<b>Searchable PDF Kit 2.0</b>	Provides the feature of Searchable PDF and DocuWorks, scan to Word/Excel.
EC105160	<b>Wireless Network Kit</b>	Adapter type. Enables Wireless LAN with Bluetooth.
EC105015	<b>Secondary Ethernet Kit</b>	Allows two Ethernet networks to be connected to a single device. <b>This item is Special Order Equipment.</b>
EC104990	<b>Adobe PostScript 3 Kit</b>	Enables Postscript printing, and printing of PDF files using the EWS (Embedded Web Server). <b>Includes ED201136 (Label)</b>

Part Number	Description	Notes
<b>Other Accessories continued</b>		
ED201136	<b>Adobe PostScript 3 label</b>	Mandatory label for Adobe Postscript 3
EC105000	<b>Image Log Kit</b>	Track document movement and prevent information leaks through multifunction device <a href="#">Requires AWIL Service</a>
EC105001	<b>Image Log Kit (Adobe PostScript)</b>	Track document movement and prevent information leaks through multifunction device. <a href="#">Requires AWIL Service and Adobe PostScript Kit</a>
EC105013	<b>Wing Table</b>	Side table attached to the left side of the machine.
E9100211	<b>Attention Light</b>	A light notifies the state of the MFD. Requires mandatory Accessory cable. <a href="#">This item is Special Order Equipment.</a>
E9100212	<b>Assist handle</b>	Aiding tool for closing the DADF. <a href="#">This item is Special Order Equipment.</a>
EC105007	<b>Embedded IC Card Reader B<sup>*2</sup></b>	Supports multiple card type such as Felica, MiFare HID Prox, HID iClass, EM Prox, Indala Prox.
EC104839	<b>External IC Card Reader B<sup>*2</sup></b>	Supports multiple card type such as Felica, MiFare HID Prox, HID iClass, EM Prox, Indala Prox. <a href="#">Either Wing Table or Accessory Table B is required when installing External IC Card Reader B, unless Finisher C5 is Installed.</a>
EC104204	<b>Accessory Table B</b>	Installed to the right side to support the external ICCR-B reader. <a href="#">This item is Special Order Equipment.</a>
EC105017	<b>Accessory Cable</b>	For EPA interface. Required when installing Attention light II or EPSV. <a href="#">This item is Special Order Equipment.</a>

<sup>\*1</sup>: Finishers are unique to Apeos C3061/ C2561 / C2061. Finishers from the previous models cannot be installed.

<sup>\*2</sup>: Please consult your FBAU Sales representative for compatible card reader and authentication terminal options. The FBAU Software Solution will determine the correct type of reader and terminal combination for your environment.

# Product Performance

This section provides details of the performance of the Apeos C3061/ C2561 / C2061. This includes any known system limitations, image quality information and the way media and other factors can affect image quality and product performance.

## Product Limitations

This product is designed to provide “benchmark” image quality and performance for its class. The following factors are known to affect machine performance and output print quality:

- High toner density and area coverage.
- Monthly output volume consisting of >10% of heavy weight, coated or special throughput stock, which is out of, or close to, specification limits.
- Paper condition (The way that it is handled and stored).

Environment: Heat, humidity, a lack of ventilation, and emissions from other equipment will downgrade system performance. Air-conditioned sites are strongly recommended (refer to the Installation requirements section of this document).

Operator skill and understanding of applications file management, and colour theory will affect the quality of the final output. Colour quality perception is subjective and will be affected by surrounding lighting conditions. Like other colour reproduction processes, there will be some variation in output quality and colour registration over time e.g. long runs with an area coverage >70% (per colour).

## Image Alignment

- Image to paper alignment can vary up to 2.7 mm in the lead edge to trail edge direction, and up to 3.1 mm from side to side, depending on paper stock, machine set up and other factors.
- Lead Edge skew will be within 2.0 mm per 200 mm.
- Side Edge skew will be within 4.0mm per 400mm.

## Print Speeds and First Copy Output

- During output to Face Down Tray, taking the time from when the tail edge of the first sheet is outputted from the Exit output until the tail edge of the 11th sheet is outputted from the MC output to be  $t$  sec, the number of sheets printed in a minute given by the formula  $[(60/t) \times 10$  for one side,  $(60/t) \times 20$  for two side].
- First Copy Output specification is dependent on machine configuration and firmware version. Speed is reduced when optional kits are installed or firmware is changed from initial version.

## Duplex Speed

- With Finisher- A3/B5 installed, duplex speed is reduced when printing to the Centre output tray. To allow the device to print at rated speed, set the output destination to the Finisher output tray.

## Apeos C2061 Limitations

The Apeos C2061 model does not include a SSD (Solid state Drive), the functionality and features are therefore limited. Please refer to the below table for non-supported features and functions.

Function	Limited features and restrictions
Copy	<p>The following features are not available:</p> <ul style="list-style-type: none"> <li>• Annotations.</li> <li>• Combined Job.</li> <li>• Booklet Creation.</li> <li>• Watermark (Basic function).</li> <li>• Covers.</li> </ul>
Print	<p>The following features are not available:</p> <ul style="list-style-type: none"> <li>• Overlay printing.</li> <li>• Thumbnails view (Private Charge Print, Secure Print, Print from Folder).</li> <li>• Watermark.</li> <li>• Print UUID.</li> <li>• Annotations.</li> <li>• Thin Print.</li> <li>• Universal Print by Microsoft.</li> <li>• Server-less On-demand Print (Private Charge Print/Select ID and Print).</li> </ul>
Scan	<p>The following features are not available or have limitations.</p> <ul style="list-style-type: none"> <li>• Scan (URL).</li> <li>• Maximum number of Job Flow Sheets that can be created: 200.</li> </ul>
Fax	<p>The following features is not available.</p> <ul style="list-style-type: none"> <li>• Paperless Fax Settings.</li> </ul>
Authentication	<p>The following features are not available.</p> <ul style="list-style-type: none"> <li>• Use of Account ID or Sub User ID for ApeosWare Management Suite linkage.</li> <li>• Azure AD linked authentication, Custom authentication, Account ID feature.</li> <li>• Cache feature for AD authentication.</li> </ul>
Options	<p>The following options are not available.</p> <ul style="list-style-type: none"> <li>• External Access kit.</li> <li>• Copy Management Expansion Kit.</li> <li>• Secure Watermark Kit.</li> <li>• Image Log Kit.</li> <li>• Image Log Kit (Adobe PostScript).</li> </ul>
Related SW products	<p>The device cannot link with the following SW products:</p> <ul style="list-style-type: none"> <li>• ApeosWare® Management Suite 2 (Image Log).</li> <li>• Device Log Service (LoDeM).</li> </ul> <p>Note: It is not possible to link with the device if the applicable conditions of other SW products. state that HDD/SSD is mandatory.</p>
Add-on applications	<p>Add-on applications cannot be installed on the device.</p> <p>Example of applications not available:</p> <ul style="list-style-type: none"> <li>- Scan Delivery/Scan Delivery Light.</li> <li>- Server-less On-demand Print kit.</li> <li>- Job History Export.</li> <li>- Server-less Authentication .</li> <li>- Working Folder (Redirector).</li> <li>- Cloud Service HUB (Redirector).</li> <li>- Paperless Fax Delivery .</li> <li>- Announcements.</li> <li>- Setting Backup.</li> <li>- Connecting APP for Kintone.</li> <li>- DocuShare (Scan &amp; Print).</li> </ul> <p>Note: In addition to those listed as above, other add-on applications cannot be installed.(including add-on apps provided by third-party vendors).</p>

Function	Limited features and restrictions - Continued
<b>Finishing</b>	The following restriction may apply. • If a single document contains large amount of data (*), the device cannot process the finishing job as specified. (*) too many pages, too many color pages, etc.
<b>Restrictions on EP-BB operation</b>	The following processing cannot be performed from EP-BB. • Batch process (Submit the SSMI command to run remotely). • Automatic notification of debug log. • Set a Chain-Link remotely. • FW downloading on background (Note: FW downloading itself is possible).
<b>Others</b>	The following features are not available: • External Access Kit. • Back up/restore files in Folder with Setting Restore Tool. • Device Settings Backup Service.

## Data

Usage area	Change of capacity
<b>Document storage</b>	Used for Store to Folder/Private Charge Print/Secure Print/Print from Folder/ Fax reception etc. 200MB.
<b>Scan</b>	Scan (to Email/PC), temporary saving data before internet fax transmission 200MB.
<b>Print reception/ Temporary storage area for email received data</b>	150MB.
<b>Copy</b>	100MB. If exceeding the upper limit, the message appears asking whether to proceed jobs that have been stored so far or to cancel.
<b>Customised data per user</b>	16MB.
<b>Create Pins</b>	32MB (SSD installed: 200MB) Job histories that can be saved: up to 200 items Pins that can be saved: up to 200 items.

## Fax

- It is recommended to load originals in landscape (SEF) orientation when faxing.
- Digital & Analogue Fax service cannot be used concurrently. Users can choose between digital or analogue Fax services in tools mode. Please consult the FBAU support centre for more detail.
- Telstra “FaxStream Duet” (distinctive ring) is not supported.
- Call Waiting feature must be disabled on the fax line.
- G4 fax (ISDN) fax is not available. Digital lines are not supported.
- Faxing from Macintosh print driver is not supported.
- The fax device is designed to meet the T.30 protocol as set by ITU-T Recommendations, which specifies that a facsimile must be connected to a public switched telephone network (PSTN).
- For optimum performance, a dedicated analogue line must to be installed for each fax port.
- A dedicated analogue line must not be shared by any other device or system, such as ADSL, EFTPOS or alarm systems, etc.
- The facsimile device is designed to conform to the Australian Telecommunication Signalling Requirements under the AS/ACIF S002:2005 Appendix E paragraph 5.5.1.1.1 Note 3. This states that the standard ring cadence is nominally 0.4s ON, 0.2s OFF, 0.4s ON and 2.0s OFF.
- Only UNI-V ports are supported for fax transmissions on our devices when connected to the NBN. For more information please contact your Internet Service Provider.
- Faxing over “VoIP” (Voice over IP) and “FoIP” (Fax over IP) networks cannot be guaranteed. In these cases, networks will need to be configured by the supplier to establish optimum fax protocol. Where poor fax performance is still an issue, a dedicated analogue line will need to be installed.

## Internet Fax, IP Fax (SIP)

- Digital & Analogue Fax service cannot be used concurrently. Users can choose between digital or analogue Fax services in tools mode. Please consult the FBAU support centre for more detail.
- Direct Fax feature is not supported for devices operating with the Fax Server.
- Fax workflow cannot be specified as a Job Flow Sheet destination for devices operating with the Fax Server.
- The machine needs to be connected to a network and support TCP/IP communication.
- Faxing over “VoIP” (Voice over IP) and “FoIP” (Fax over IP) networks cannot be guaranteed. In these cases, networks will need to be configured by the supplier to establish optimum fax protocol. Where poor fax performance is still an issue, a dedicated analogue line will need to be installed.
- It is recommended that for reliable IP faxing the network should be configured for T.38 with redundancy.

## Microsoft Universal Print

Microsoft Universal Print is a service that allows you to print documents through Microsoft cloud.

- Microsoft Universal print will only support basic features of the MFD of Colour, Black and White and 2 sided. To use other features of the device you will need to install the model specific driver. Licencing for Microsoft Universal Print will need to be purchased through Microsoft.
- For more detail on MUP, please refer to the Microsoft website found here:  
<https://docs.microsoft.com/ja-jp/universal-print/>

## Printing from USB and camera media

- The Media Print Kit enables printing PDF, TIFF and XPS files from USB memory (media Text mode).
- Copying the DCIM folder with content from Digital Still Camera media to USB root directory will also allow printing of JPEG files (media Photo mode).
- The internal Auditron can restrict access to the optional USB Media Print (Text/Photo) feature; however access control can only be set for the MFD, not for individual users.
- Text mode printing will result in low image quality.
- For all supported formats, the data size of one file should be 4 GB or less for printing.

## Store to USB

- Only USB devices compatible with USB 3.0 and capacity of up to 128GB are supported.
- Only FAT12, FAT16, FAT32, exFAT and VFAT file systems are supported. NTFS is not supported.
- USB devices that are encrypted with software cannot be used with the machine.
- Jobs are stored in the root directory of the USB device.
- The internal Auditron can restrict access to the optional Store to USB feature, however access control can only be set for the MFD. Individual users can be controlled using LDAP groups.
- Refer to the product Reference Guide, “Store to USB”, for further information regarding this feature.

## Searchable PDF

- Searchable PDF Kit 2.0 is required.
- OCR recognition technology is not 100% accurate.
- Mistakes in OCR recognition, layout discrepancies, and colour differences may occur in the generated searchable PDF format document when compared to the original scanned document. The customer should check the original against the document and correct discrepancies manually.
- Searchable PDF Kit supports OCR recognition in Microsoft Word®, Excel® and PDF.

## Gesture UI

- Only the flick, drag, tap and double tap gestures are available.
- The following menus support the flick/drag gesture feature:
  - All Services.
  - Folders.
  - Selecting Jobs/Documents.
  - Presets.
  - Job Status.
  - Network browsing list.
  - 1st screen of Tools.
  - Preview screen.
  - Copy, Fax, Scan - gesture to next page.
  - The double tap (zoom) gesture is only available for the preview screen.
  - Pinch to zoom in/out is not a supported gesture.

## Printing from Mobile Devices (FBAU Print Utility)

- Printing from mobile devices by just pointing the devices to MFD is available through the Wi-Fi Direct feature of the Wireless Network Kit and must be enabled.
- The activation of the Bonjour protocol is required for automatic recognition of MFDs and printers.

The Bonjour protocol cannot be used under Wi-Fi Direct printing. A manual IP address must be entered. Further information can be found at <https://support-fb.fujifilm.com/setupSupport.do>

- The Adobe® PostScript® 3 kit is required for some MFDs and printers in order to use the Bonjour protocol.
- Please refer to the official FBAU homepage: <https://www-fbau.fujifilm.com/en>

## Mopria

- Mopria allows for printing from a Mopria-certified mobile device without the need to install a manufacturer or model specific printing application.
- Printing can only be performed through apps that support Mopria Print Service. For a sample list of supported apps, please refer to <http://mopria.org/>.
- Mopria Print Service is required to be downloaded from the Google Play Store and is only supported on Android 4.4 or later.
- Mopria Print Service is not supported through Bluetooth, cellular 3G or 4G connections.
- Please refer to <http://mopria.org/> for further information and limitations on the Mopria Print Service feature.

## AirPrint

- Enables printing from printers on a network without downloading software or drivers.
- Supports printing from Safari, E-mail, Maps, Adobe Reader and Photos.
- Supported on iOS 6 or later, MacOS X 10.8 or later.
- AirPrint does not support authenticated printing or Private Charge Print.
- If SSL is disabled after printing with both basic authentication and SSL specified in the AirPrint settings of the machine, the printer may not be able to be detected. In this case, enable the SSL settings of the machine again.
- A user name and password may be requested in the following cases. It needs to delete and re-register the printer in OS X.
  - “Basic authentication” is ON in the AirPrint settings of the machine.
  - Registering a device from “Printers & Scanners” in OS X.
  - “Basic authentication” is changed to OFF in the AirPrint settings of the machine
- The hole punch position is fixed when using AirPrint. To specify the position to perform hole punching, use the FBAU printer driver.
- Hole punching and some paper types cannot be specified with OS X 10.8. To enable these features, please update to OS X 10.9.
- Printing cannot be performed from “Print” due to a problem with Photoshop CS6.

## Wireless Network Kit

- Enables MFD to connect wirelessly to an access point and/or enables Wi-Fi Direct printing capability.

### Customer Pre-Requisites

- Customers are required to have a working wireless network and allow for the MFD to connect wirelessly
- It is the customer responsibility to maintain and resolve wired and wireless network issues. The customer is required to provide FBAU information on the wireless network SSID, encryption type and the passphrase of the network they wish to connect the MFD to, before installation.

### Technical Pre-Requisites

- The range of the Wireless Network Kit is dependent on where the unit is mounted. The FBAU Wireless Network Kit has a rated assumed interference distance is 40 metres or less.
- For further information about notes, safety instruction and specification you may refer notes of the FBAU Wireless Network Kit setup guide.

## Installation

- FBAU will configure the MFD to a compatible existing wired or wireless network of customer. If the customer changes their network this may impact MFD connectivity and the customer is responsible for ensuring ongoing compatibility with the customer's network. FBAU may be able to provide assistance in this regard at an additional cost.

## Printing using Wi-Fi Direct

- Printing and scanning via Wi-Fi Direct is only supported via the FBAU Print Utility on Android or iOS.
- The FBAU Print Utility does not automatically search for a printer when connecting via Wi-Fi Direct. A manual IP address must be entered, please refer to the FBAU Support website for more information.

iOS does not officially support connection to an MFD via Wi-Fi Direct. There is a manual workaround which can be found online at <https://support-fb.fujifilm.com/setupSupport.do>

- Mopria and AirPrint is not available through Wi-Fi Direct.
- If Wi-Fi Direct is running concurrently to an infrastructure connection to an access point, if the infrastructure side is disconnected, Wi-Fi Direct becomes unavailable.
- A maximum of four devices can be currently connected to the MFD via Wi-Fi Direct.

## Support

- FBAU can provide helpline support over the phone at 1 800 028 962.

Please refer to FBAU internet-based support system at <https://support-fb.fujifilm.com/setupSupport.do> for further information regarding the Wireless LAN feature.


## Secondary Ethernet

- Enables two networks to be connected to a single device (i.e. private and public).
- Printing with LPD, port 9100, SNMP, and HTTP protocols only.
- Internet fax and IP fax is not supported on Secondary Ethernet.
- Mopria cannot be used with Secondary Ethernet.
- AirPrint cannot be used with Secondary Ethernet, please use Print Utility for iOS
- When using Mac OS X printer driver and Print Utility for iOS/Android, IP settings must be specified manually.
- Printing using the IPP protocol of ContentsBridge (for Windows) cannot be performed.
- Scan to PC, E-mail, Store & Send Link, Store to WSD, ScanAuto, Job Flow, Job Flow Sheets cannot be used on Secondary Ethernet, use Scan to Folder or CentreWare Internet Services.
- Network Scanner Utility 3, Scan function on Print Utility for IOS/Android or setting Restore Tool cannot be used on Secondary Ethernet.
- Common settings are used for Standard Ethernet and Secondary Ethernet. Opening ports, reception memory/reception port number, number of items that can be received at the same time, IPSec cannot be separated.
- IPv6 DNS cannot be set automatically.

## Remote Operations Panel

The remote operation panel feature provides a remote operation using a PC and the device user interface to make changes to the system settings, customize pins and operations.

User accesses the device with the IP address via a web browser and log in as the system administrator. Then, the control panel of the device becomes operable. (Connecting one-to-one).

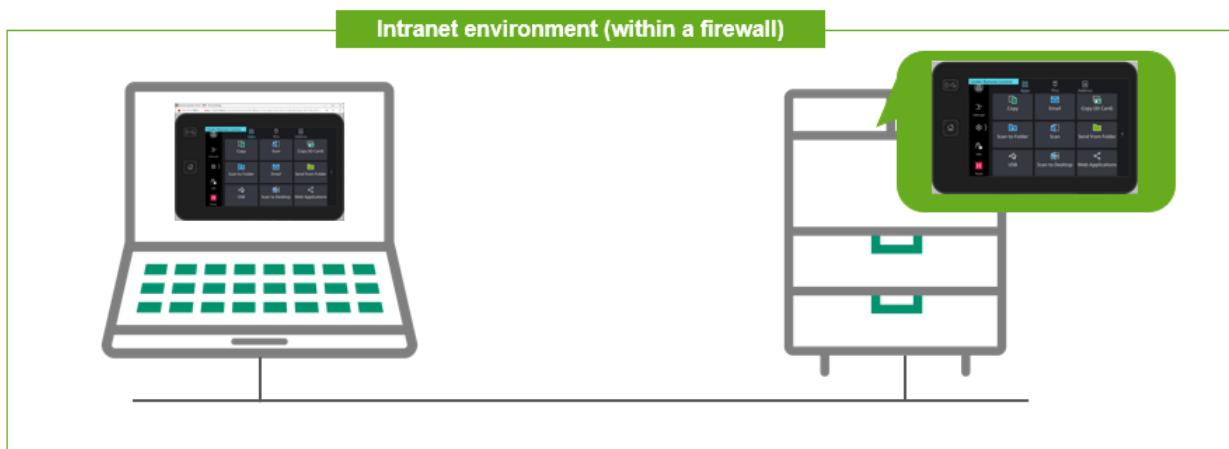

### Notes and Restrictions:

- You cannot operate the control panel of the MFP while Remote Operation Panel is active.
- When Remote Operation Panel is active, the message "Under Remote Control" is displayed on the control panel of the MFP.
- You cannot start the Remote Operation Panel from multiple PCs at the same time.
- The Remote Operation Panel cannot start while the user is operating the MFP.
- Concurrent use with Remote Assistance is not allowed.

- Third parties cannot view a user password, a password for Folder, or the system administrator ID as the screen is shown as Fig.1.



Figure 1.

However, please keep in mind that third parties can view the state of the control panel on which you are performing any tap operation, except for the password entry screen.

- In the proxy server settings on the computer, set "Use a proxy server" to "Off".
- For MacOS 10 and 11, use Chrome browser. Alternatively, please use a computer running MacOS 12 or later.
- Basic mouse operations are available, but use of the right mouse button and the scroll wheel are not supported.
- Remote Operation Panel cannot be used when the device is installed with cost recovery accessories such as a coin box.
- Pinch out/in are not possible on the preview screen.
- When the device switches to Power Saver Mode or Remote Operation Panel is not used for a fixed period of time, the connection will be disconnected.

# Installation Requirements

This section contains information on preparing for the delivery and installation for the Apeos C3061/C2561/C2061 products.

## General Installation Requirements

- The product should not be exposed to direct sunlight, external heat sources, excessive dust or vibration.
- Do not operate the machine in a poorly ventilated room.
- The machine must be located on a stable and level floor.

## Delivery Restrictions

Any deliveries not occurring at street level locations must have elevators large enough to accommodate the product modules. Passageways (doorways and hallways) must also be large enough to allow the machine to pass through.

## Temperature & Humidity

Maximum: 32°C and 85%RH  
Minimum: 10°C and 10%RH

Drastic climatic changes are detrimental to image quality, performance and consistency. It is strongly recommended that the product be operated in an air-conditioned environment to achieve best performance.

## Electrical Requirements

220-240 Volt, 50/60 Hz and a dedicated 10 Amp supply is required for each machine installation\*.

- \*Where a dedicated supply is not available, it is the customer's responsibility to provide the equivalent, and where the equivalent is not available, FBAU will not be held responsible for any damage that may occur.
- FBAU will not be held responsible for any damage that may occur as a result of lightning strikes, power surges, etc.

For more details on Electrical and Mechanical safety, Energy consumption, Chemical emissions, Noise or heat please refer to the product PSDS.

# Machine Weight

## Machine Weight

Item	Item (Individual)	Main unit + Item
	Unpacked weight	
Main Unit (MFD)	60 kg	
+ 1 Tray Module (1TM)	15 kg	75 kg
1 Tray Module with Cabinet	21 kg	81 kg
3 Tray Module (3TM)	23 kg	83 kg
Finisher-A3	10 kg	70 kg
Finisher-B5	28 kg	88 kg
Finisher-B5 + 2/4 Hole punch	30 kg	90 kg
Finisher-B5 + Booklet Maker	38 kg	98 kg

## Machine Dimensions and Space Requirements (Minimum Service Clearance)

These specifications are based upon accepted Workplace Health and Safety standards and allow for the safe and effective operation and servicing of the device, including space for:

- Moveable components, such as draws and doors.
- A technician to safely access the device.

These space requirements (site width & site depth) are the minimum requirements\* and compliance with these standards is mandatory for the safety of staff members for the Australian market\*\*. Site width and site depth changes with each configuration. Refer to the tables below for actual site requirements for each configuration.

\* Note: Where a device is installed adjacent to an access way, additional space over and above that specified in this document may be required. Space required for access ways is dependent on circumstance, and it is recommended that the local statutory body be contacted for advice.

\*\* Note: 'Machine installation' figures presented in the Reference Guide represents the machine dimensions and the dimensions when the trays have been fully extended. These do not represent space requirements or service clearances for Australia.

FBAU does recommend that the MFD, in a desktop configuration, be installed on an elevated platform (such as a sturdy table) and not on the floor or on carpeted areas. When installing on an elevated platform (such as a sturdy table), the MFD must be installed on a stable platform rated to support the weight of the device and have the minimum dimensions listed in the table below. This will allow an engineer sufficient room to rotate the device in order to service the rear section of the device.

Minimum overhead workspace clearance (within site area) for all installations = 2,000 mm (H).  
Desktop Installation: Maximum installation height from floor to top of machine = 1,500mm (H)

## Apeos C2061

Item	Installation Space		Occupied Space	
	Width (mm)	Depth (mm)	Width (mm)	Depth (mm)
<b>Main Unit</b>	1094	1579	931	659
<b>Main Unit + 1TM</b>	1094	1579	931	659
<b>Main Unit + 3TM<sup>*1</sup></b>	1094	1579	931	659
<b>Main Unit + 3TM + Side Tray</b>	1094	1579	931	659
<b>Main Unit + 3TM + Finisher A3</b>	1242	1579	1103	659
<b>Main Unit + 3TM + Finisher B5</b>	1661	1579	1522	665
<b>Main Unit + 3TM + Finisher B5 + Booklet</b>	1661	1579	1522	671

<sup>\*1</sup>: The 3TM and 1TM with Cabinet has same dimensions.

## Apeos C2561/C3061

Item	Installation Space		Occupied Space	
	Width (mm)	Depth (mm)	Width (mm)	Depth (mm)
<b>Main Unit</b>	1094	1579	935	659
<b>Main Unit + 1TM</b>	1094	1579	935	659
<b>Main Unit + 3TM</b>	1094	1579	935	659
<b>Main Unit + 3TM + Side Tray</b>	1094	1579	935	659
<b>Main Unit + 3TM + Finisher A3</b>	1242	1579	1103	659
<b>Main Unit + 3TM + Finisher B5</b>	1661	1579	1522	665
<b>Main Unit + 3TM + B5 + Booklet</b>	1661	1579	1522	671

<sup>\*1</sup>: The 3TM and 1TM with Cabinet has same dimensions.

## Apeos 360 View

Customers can further view the device dimensions by clicking here: [Apeos 360 View \(fujifilm.com\)](http://fujifilm.com)

# Support

## Customer Support

### eSupport

Our internet-based support system can be accessed at: <https://support-fb.fujifilm.com/> and includes a number of services:

#### Online Support Assistant

The Online Support Assistant allows users to obtain instant self-help, step-by-step instructions and information on FBAU products 24 hours a day, 7 days a week.

#### Interactive User Guide

The Interactive User Guide provides users with interactive demonstrations on the key features of the machine. It also provides step-by-step instructions on commonly asked question featuring screen captures of the UI.

#### My Account

My Account provides access to information about your account. You can view your invoice details, submit your meter readings, order toner or request machine relocations.

#### Online Supply Ordering

For a full range of products, you can access the site directly at <https://www.fujifilm.com/fbau/supplies>

## Customer Support Centre

The FBAU Customer Support Centre is available 24/7 for all service calls and for customer application requests. You can contact them via <https://support-fb.fujifilm.com/> or on 1800 028 962.

## Customer Training

On completion of your device installation, you will receive a brief product overview which covers basic device functions (time permitting). If you would like to book an operator training session, please call Customer Care on 1800 028 962 or email: [shm-fbau-websupport@fujifilm.com](mailto:shm-fbau-websupport@fujifilm.com)  
This training session is valid for 3 months after the date of the device installation.



For more information or detailed product specification, please call or visit us at

**FUJIFILM Business Innovation Australia Pty Ltd**

8 Khartoum Road MACQUARIE PARK NSW 2113 Australia

Tel. 13 14 12

[www.fujifilm.com/fbau](http://www.fujifilm.com/fbau)