FUJIFILM
Value from Innovation



A3 Colour Multifunction Printer

Apeos C7072 / C6572 / C4572 / C3572 / C3072

Functions & Specifications

Apeos™

Basic Specifications/Copy Function

Item		Description				
		C7072	C6572	C4572	C3572	C3072
Type		Console				
Memory Capacity		6 GB (System Memory: 4 GB, Page Memory: 2 GB, Max: 6 GB)				
CPU		Cortex-A57 2.0 GHz Quad Core				
Storage Device Capacity*1		256 GB				
Colour Capability		Full colour				
Scan Resolution		600 x 600 dpi				
Printing Resolution		1,200 x 2,400 dpi (Text-Photo / Photo), 600 x 600 dpi (Text / Map)				
Warm-up Time*2		20 seconds or less (23 degrees Celsius room temperature)				
Recovery Time (Recovery Time from Sleep mode)		10.1 seconds or less (23 degrees Celsius room temperature)		8.1 seconds or less (23 degrees Celsius room temperature)	6 seconds or less (23 degrees Celsius room temperature)	
Original Size		Maximum of A3, 11 x 17", 297 x 432 mm for both Sheet and Book				
Paper Size	Tray 1*3	Max: A3, 11 x 17" Min: A5 SEF, Envelope*4, Postcard (100 x 148 mm) Custom Size: 90 x 98 mm to 297 x 432 mm				
	Tray 2	Max: SRA3 (320 x 450 mm), 12 x 18" (305 x 457 mm), A3 Min: A5 SEF, Postcard (100 x 148 mm) Custom Size: 100 x 148 mm to 320 x 457 mm				
	Tray 3, 4	Max: A4 LEF, Letter LEF Min: JIS B5 LEF			Max: SRA3 (320 x 450 mm), 12 x 18" (305 x 457 mm), A3 Min: A5 SEF, Postcard (100 x 148 mm) Custom Size: 100 x 148 mm to 320 x 457 mm	
	Bypass Tray	Max: SRA3 (320 x 450 mm), 12 x 19" (305 x 483 mm), A3 Min: A5 SEF, Envelope*5, Postcard (100 x 148 mm) Custom Size:89 x 98 mm to 320 x 483 mm				
	Image loss Width*6	Lead edge 4.0 mm, Trail edge 2.0 mm, Right/Left edge 2.0 mm				
Paper Weight*7	Paper Tray	52 to 300 gsm				
	Bypass Tray	52 to 300 gsm				
First Copy Output Time	B/W*8	3.3 sec.		4.4 sec.	4.9 sec.	
	Colour*9	4.1 sec.		5.7 sec.	6.7 sec.	

Item		Description				
		C7072	C6572	C4572	C3572	C3072
Continuous Copy Speed[*10]	A4 LEF/ JIS B5 LEF	B/W: 70 ppm Colour: 70 ppm	B/W: 65 ppm Colour: 65 ppm	B/W: 45 ppm Colour: 45 ppm	B/W: 35 ppm Colour: 35 ppm	B/W: 30 ppm Colour: 30 ppm
	A4 / JIS B5	B/W: 50 ppm Colour: 50 ppm	B/W: 47 ppm Colour: 47 ppm	B/W: 32 ppm Colour: 32 ppm	B/W: 27 ppm Colour: 27 ppm	B/W: 23 ppm Colour: 23 ppm
	JIS B4	B/W: 41 ppm Colour: 41 ppm	B/W: 38 ppm Colour: 38 ppm	B/W: 26 ppm Colour: 26 ppm	B/W: 22 ppm Colour: 22 ppm	B/W: 20 ppm Colour: 20 ppm
	A3	B/W: 35 ppm Colour: 35 ppm	B/W: 32 ppm Colour: 32 ppm	B/W: 22 ppm Colour: 22 ppm	B/W: 19 ppm Colour: 19 ppm	B/W: 17 ppm Colour: 17 ppm
Paper Tray Capacity[*11]	Standard	520 sheets x 2-tray + 840 sheets + 1,230 sheets + Bypass Tray 100 sheets			520 sheets x 4-tray + Bypass Tray 100 sheets	
	Optional	High Capacity Feeder B1: 2,000 sheets				
	Max	5,210 sheets (Standard + High Capacity Feeder B1)			4,180 sheets (Standard + High Capacity Feeder B1)	
Output Tray Capacity[*12]		Upper Centre: 250 sheets (A4 LEF), Lower Centre: 250 sheets (A4 LEF)				
Power Supply		AC220-240 V +/- 10 %, 8 A, 50/60 Hz common				
Maximum Power Consumption		2.2 kW (AC220 V +/- 10 %), 2.4 kW (AC240 V +/- 10 %) Sleep mode: 0.3W (AC230 V) Low Power Mode: 37W[*13] (AC230 V) Ready mode: 48W (AC230 V)				
TEC Value		0.64 (AC230 V)	0.61 (AC230 V)	0.38 (AC230 V)	0.30 (AC230 V)	0.26 (AC230 V)
Dimensions		W 598 x D 685 x H 1,153 mm				
Weight[*14]		135 kg		134 kg	126 kg	

*1: Storage Device Capacity is not totally available for customers.
*2: It may change depending on usage conditions.
*3: 90 x 98 mm to 241 x 372 mm is available when the Envelope Feeder is on.
*4: Supported standard envelope sizes are Commercial#10, Monarch7 3/4, and DL, etc.
*5: Supported standard envelope sizes are ISO-C4 and ISO-C5.
*6: Up to A3 size.
*7: It is recommended to use our recommended paper. Correct print output may not be possible depending on the requirement.106 to 300 gsm, when the Envelope Feeder is on.
*8: A4 LEF / Monochrome priority mode.
*9: A4 LEF / Colour priority mode.
*10: The speed may be reduced due to the image quality adjustment.
*11: 80 gsm paper.
*12: 70 gsm paper.
*13: Low Power Mode is not enabled as factory default.
*14: Excluding Toner Cartridge.

Print Function

Item		Description
Type		Built-in type
Print Size	Tray 1	Same as the Basic Specifications / Copy Function
	Tray 2	Same as the Basic Specifications / Copy Function
	Tray 3, 4	Same as the Basic Specifications / Copy Function
	Bypass Tray	Max: SRA3 (320 x 450 mm), 12 x 19" (305 x 483 mm), A3 Min: A5 SEF, Envelope*1, Postcard (100 x 148 mm) Custom Size:89 x 98 mm to 320 x 1,200 mm*2
	Image loss width*3	Same as the Basic Specifications / Copy Function
Continuous Print Speed*4		Same as the Basic Specifications / Copy Function
Printing Resolution	Standard	[PCL Driver] Standard: 1,200 x 2,400 dpi, High Quality: 1,200 x 2,400 dpi, High Resolution: 1,200 x 1,200 dpi
	Optional	[Adobe® PostScript® 3™ Driver] High Speed (Standard): 600 x 600 dpi, High Quality: 1,200 x 2,400 dpi, High Resolution: 1,200 x 1,200 dpi
Page Description Language	Standard	PCL5 / PCL6
	Optional	Adobe® PostScript® 3™
Supported Operating System*5	Standard	[PCL Driver] Windows 11 (64 bit), Windows Server 2025 (64 bit), Windows Server 2022 (64 bit), Windows Server 2019 (64 bit), Windows Server 2016 (64 bit)
		[Mac OS Driver] macOS 26 / 15 / 14 / 13 / 12
	Optional	[Adobe® PostScript® 3™ Driver] Windows 11 (64 bit), Windows Server 2025 (64 bit), Windows Server 2022 (64 bit), Windows Server 2019 (64 bit), Windows Server 2016 (64 bit)
		macOS 26 / 15 / 14 / 13 / 12
Interface	Standard	Ethernet 1000BASE-T / 100BASE-TX / 10BASE-T
	Optional	Wireless LAN (IEEE 802.11a / b / g / n / ac), USB3.0

*1: Supported standard envelope sizes are Commercial#10, Monarch 7 3/4, DL, ISO-C4, etc.
*2: Long paper of 106 to 220 gsm (Extra Heavyweight) is available. The printed papers are delivered to the Side Tray when Finisher-A4 / Finisher-C5 / Finisher-C5 with Booklet Maker is attached.
*3: Up to A3 size.
*4: The speed may be reduced due to the image quality adjustment. The printing speed may be reduced depending on the document.
*5: Please refer to our official website for the latest supported OS.

Scan Function

Item		Description
Type		Colour Scanner
Scan Resolution		600 x 600 dpi, 400 x 400 dpi, 300 x 300 dpi, 200 x 200 dpi
Scan Speed		Same as the Scan Speed for the Duplex Automatic Document Feeder
Interface	Standard	Ethernet 1000BASE-T / 100BASE-TX / 10BASE-T
	Optional	Wireless LAN (IEEE 802.11a / b / g / n / ac)

Fax Function (Optional)

Item	Description
Original Size	Max: A3, 11 x 17", Long document (Longest 600 mm[*1])
Recording Paper Size	Max: A3, 11 x 17" Min: A5
Transmission Time	2 seconds and more but fewer than 3 seconds[*2]
Transmission Mode	ITU-T G3
Applicable Lines	Public Switched Telephone Network (PSTN), PBX, Maximum 3 ports[*3] (G3-3 ports)

*1: When Duplex Automatic Document Feeder is used.
*2: When A4 size document with approximately 700 characters is transmitted in standard image-quality (8 x 3.85 lines/mm) and in high-speed mode (28.8 kbps or faster, JBIG). Only indicates the time for transmitting the image information and does not include the communication control time. The total communication time will vary depending on the contents of the document, the type of machine receiving the fax, and line condition.
*3: No. of FAX lines is up to 3 ports. Port refers to number of channels for FAX.

Duplex Automatic Document Feeder C3-PC

Item		Description				
		C7072	C6572	C4572	C3572	C3072
Original Size[*1]		Max: A3, 11 x 17" Min: A6				
Paper Weight		38 to 220 gsm (In Duplex: 50 to 220 gsm)				
Capacity[*2]		300 sheets				
Scan Speed[*3]	Copy (A4 LEF, Simplex)	B/W: 70 ppm Colour: 70 ppm	B/W: 65 ppm Colour: 65 ppm	B/W: 45 ppm Colour: 45 ppm	B/W: 35 ppm Colour: 35 ppm	B/W: 30 ppm Colour: 30 ppm
	Scan	B/W: 150 ppm, Colour: 150 ppm (1 pass, 2 sided scanning: B/W 300 ppm, Colour 300 ppm) [Standard Document (A4 LEF), 200 dpi, 300 dpi, to Folder.]				

*1: Custom size is 49 x 85 mm to 297 x 432 mm.
*2: 70 gsm paper.
*3: The scanning speed varies depending on the documents.

Finisher-A4 (Optional)

Item		Description
Type	Centre Tray	Stack
	Finishing Tray	Sort (Offset available[*1]) / Stack (Offset available[*1])
Paper Size	Centre Tray	A4, A3
	Finishing Tray	Max: A3, 11 x 17" Min: A6, Postcard (100 x 148 mm) Custom Size: 89 x 98 mm to 297 x 432 mm
Paper Weight[*2]	Centre Tray	52 to 300 gsm
	Finishing Tray	52 to 256 gsm
Paper Capacity[*3]	Centre Tray	A4 LEF: 125 sheets A4 SEF, A3: 50 sheets
	Finishing Tray	[Without Stapling] A4 LEF: 500 sheets, JIS B4: 250 sheets, A3 or larger: 200 sheets, Mixed Size Stacking[*4]: 250 sheets [With Stapling] 30 sets, or A4 LEF: 500 sheets, JIS B4: 250 sheets, A3 or larger: 200 sheets, Mixed Size Stacking[*4]: 250 sheets
Staple	Capacity	Staple: A4: 50 sheets (90 gsm or less), JIS B4 or larger: 30 sheets (90 gsm or less) Staple-free Staple[*5]: 10 sheets (80 gsm or less)
	Paper Size	Max: A3, 11 x 17" Min: JIS B5 LEF Custom Size: 203 x 182 mm to 297 x 432 mm
	Paper Weight	Staple: 52 to 256 gsm Staple-free Staple[*5]: 64 to 105 gsm
	Position	Single stapling, Dual stapling
Dimensions / Weight		W 465 x D 484 x H 248 mm, 13 kg

Note: The unit cannot be installed on C7072 / C6572.

*1: [No Offset] is selected by factory default. Outputs less than 190 mm width are delivered without offset stacking.
*2: 52 to 55 gsm output paper may not be aligned properly depending on the paper type.
*3: 70 gsm paper.
*4: When larger size sheets are stacked on top of smaller size sheets: 250 sheets (when large size sheets are smaller than A3) / 200 sheets (when large size sheets are A3 or larger). The same applies to when staple-free and stapled bindings are mixed or different stapling positions are mixed.
*5: Staple-free stapling does not have binding force equal to stapled stapling. Bound part may be easily separated depending on the paper, temperature, humidity, and how the page is turned over.

Finisher-B5 (Optional)

Item		Description
Type	Centre Tray	Sort (Offset available[*1]) / Stack (Offset available[*1])
	Finishing Tray	Sort (Offset available[*2]) / Stack (Offset available[*2])
Paper Size[*3]	Centre Tray	Max: SRA3 (320 x 450 mm), 12 x 19" (305 x 483 mm), A3 Min: A6, Postcard (100 x 148 mm) Custom Size: 89 x 98 mm to 320 x 483 mm
	Finishing Tray	Max: A3, 11 x 17" Min: A5 Custom Size: 148 x 148 mm to 297 x 432 mm
Paper Weight[*4]	Centre Tray	52 to 300 gsm
	Finishing Tray	52 to 300 gsm
Paper Capacity[*5]	Centre Tray	200 sheets (80 gsm or less)
	Finishing Tray	[Without Stapling] A4: 2,000 sheets, JIS B4 or larger: 1,000 sheets, Mixed Size Stacking[*6]: 300 sheets [With Stapling] A4: 100 sets or 1,000 sheets[*7], JIS B4 or larger: 75 sets or 750 sheets [With Booklet Finishing[*8]] 50 sets or 600 sheets [With Fold[*8]] 500 sheets
Staple	Capacity	Staple: 50 sheets (90 gsm or less) Staple-free Staple[*9]: 10 sheets (80 gsm or less)
	Paper Size	Max: A3, 11 x 17" Min: A5 LEF Custom Size: 210 x 148 mm to 297 x 432 mm
	Paper Weight	Staple: 52 to 256 gsm Staple-free Staple[*9]: 64 to 105 gsm
	Position	Single stapling, Dual stapling
Punch[*10]	Paper Size[*11]	Max: A3, 11 x 17" Min: A5 LEF Custom Size: 148 x 148 mm to 297 x 432 mm
	Paper Weight	52 to 220 gsm
	Number of Holes	2-hole / 4-hole punch or 2-hole
Booklet Finishing[*8]	Paper Size	Max: A3, 11 x 17" Min: A4, Letter Custom Size: 210 x 279 mm to 297 x 432 mm
	Capacity	Saddle Staple: 15 sheets Single Fold: 5 sheets
	Paper Weight	Saddle Staple: 64 to 80 gsm[*12] Single Fold: 64 to 105 gsm
Dimensions[*13]		W 605 x D 653 x H 1,047 mm With Booklet Maker Unit: W 605 x D 673 x H 1,076 mm
Weight		28 kg Punch Module: + 2 kg, Booklet Maker Unit: + 10 kg

Note: Kit Finisher-B4/B5 INST is required.

*1: Paper is output without offset stacking if the width is greater than 297 mm or the length is greater than 432 mm.
*2: The offset feature is set to disabled by factory default.Outputs whose weight is 257 gsm and more or width is less than 210 mm are delivered without offset stacking.
*3: Paper in the sizes larger than A3 or 11 x 17" or smaller than A5 are delivered to the Centre Tray.
*4: 52 to 55 gsm, 257 gsm and more output paper may not be aligned properly depending on the paper type.
*5: 70 gsm paper.
*6: When larger size sheets are stacked on top of smaller size sheets.
*7: 75 sets or 750 sheets with dual stapling.
*8: The Booklet Finishing function requires the optional Booklet Maker Unit for Finisher-B. Make a crease allows you to fold easily. After a job with the Booklet Finishing function specified has been output, the next job may not be delivered until the sheets are removed from the output tray. Also, if larger size sheets are stacked on top of smaller size sheets after a job with the Booklet Finishing function specified has been run, the next job may not be delivered until the sheets are removed from the output tray.
*9: Staple-free stapling does not have binding force equal to stapled stapling. Bound part may be easily separated depending on the paper, temperature, humidity, and how the page is turned over.
*10: The Punch function requires the optional 2/4 Hole Punch Module for Finisher-B.
*11: Available number of punch holes varies depending on the paper size.
*12: Covers can be up to 220 gsm (Extra Heavyweight).
*13: Inner connector within the body is excluded. When the Extension Tray is pulled out.

Finisher-C5 with Booklet Maker & 2/4 Hole Punch (Optional)

Item		Description
Type	Centre Tray	Sort (Offset available) / Stack (Offset available)
	Output Tray	Sort (Offset available) / Stack (Offset available)
	Finishing Tray	Sort (Offset available) / Stack (Offset available)
	Booklet Tray	Sort / Stack
Paper Size	Centre Tray	Max: SRA3 (320 x 450 mm), 12 x 18" (305 x 457 mm), A3 Min: A5, Postcard (100 x 148 mm) Custom Size: 89 x 98 mm to 320 x 483 mm
	Output Tray	Max: SRA3 (320 x 450 mm), 12 x 19" (305 x 483 mm), A3 Min: A6, Postcard (100 x 148 mm) Custom Size: 98 x 148 mm to 320 x 488 mm
	Finishing Tray	Max: SRA3 (320 x 450 mm), 12 x 19" (305 x 483 mm), A3 Min: A5 LEF Custom Size: 203 x 148 mm to 320 x 488 mm
Paper Weight	Centre Tray	52 to 300 gsm
	Output Tray	52 to 300 gsm*1
	Finishing Tray	52 to 300 gsm*1
Paper Capacity*2	Centre Tray	200 sheets (A4)
	Output Tray	500 sheets (A4)
	Finishing Tray	[Without Stapling] A4: 1,500 sheets JIS B4 or larger: 1,500 sheets A5 LEF: 1,000 sheets Mixed Size Stacking*3: 300 sheets [With Stapling] A4: 200 sets or 1,500 sheets JIS B4 or larger: 100 sets or 1,500 sheets A5 LEF: 100 sets or 1,000 sheets Mixed Size Stacking*3: 70 sets or 200 sheets
	Booklet Tray	20 sets*4
Staple	Capacity	Staple: 50 sheets (90 gsm or less) *5 Staple-free Staple*6: 10 sheets (80 gsm or less)
	Paper Size*7	Max: A3, 11 x 17" Min: A5 LEF Custom Size: 203 x 148 mm to 297 x 432 mm
	Paper Weight	Staple: 52 to 300 gsm Staple-free Staple*6: 64 to 105 gsm
	Position	Single stapling, Dual stapling
Punch*8	Paper Size*9	Max: A3, 11 x 17" Min: A5 LEF Custom Size: 203 x 148 mm to 297 x 432 mm
	Paper Weight	52 to 220 gsm
	Number of Holes	2-hole / 4-hole punch
Booklet Finishing	Paper Size	Max: SRA3 (320 x 450 mm), 12 x 18" (305 x 457 mm), A3 Min: JIS B5 Custom Size: 182 x 257 mm to 320 x 457 mm
	Capacity*10	Saddle Staple: 20 sheets (90 gsm or less), Single Fold: 5 sheets (90 gsm or less)
	Paper Weight*11	Saddle Staple: 60 to 300 gsm Single Fold: 60 to 300 gsm
Dimensions*12		W 649 x D 692 x H 1,054 mm When Folder Unit CD3 is installed: W 888 x D 692 x H 1,054 mm
Weight*13		Finisher-C5 with Booklet Maker (w Punch): 61 kg Folder Unit CD3: + 52 kg

Note: Transport Unit H4 is required.

*1: 52 to 55 gsm output paper may not be aligned properly depending on the paper type.
*2: 70 gsm paper.
*3: When larger size sheets are stacked on top of smaller size sheets.
*4: When the output paper size is the same.
*5: Up to 65 sheets can be stapled when the Finisher-C Staple Unit 65 Sheets is installed. However, depending on the paper type, incorrect stapling such as uneven edge alignment of sets may occur.
*6: Staple-free stapling does not have binding force equal to stapled stapling. Bound part may be easily separated depending on the paper, temperature, humidity, and how the page is turned over.
*7: Available staple positions vary depending on the paper size.
*8: Punching function cannot be added. Select a finisher with the hole punching function.
*9: Available number of punch holes varies depending on the paper size.
*10: The maximum number of sheets varies depending on the paper weight. Booklet may not be tightly closed depending on the size or type of the paper.
*11: When using the copy function, the range of settable paper weight is limited.
*12: When the Extension Tray is pulled out.
*13: Including the dedicated unit for body connection.

Folder Unit CD3 (Optional)

Item		Description
Z Fold Half Sheet	Paper Size	A3, 11 x 17", JIS B4
	Paper Weight	60 to 90 gsm
Tri-fold	Paper Size	A4 SEF, Letter SEF
	Paper Weight	60 to 90 gsm
	Paper Capacity*1	40 sheets
Power Supply*2		AC220-240 V +/- 10 %, 0.6 A, 50/60 Hz common
Maximum Power Consumption		144 W
Dimensions		W 232 x D 588 x H 992 mm
Weight		52 kg

Note: Optional of Finisher-C5 with Booklet Maker & 2/4 Hole Punch.

*1: 70 gsm paper.
*2: Power supply separate from the main unit is required.

High Capacity Feeder B1 (Optional)

Item	Description
Paper Size	A4 LEF, Letter LEF, JIS B5 LEF
Paper Weight	52 to 216 gsm
Feeding Capacity / Number of Tray*	2,000 sheets x 1-tray
Dimensions	W 389 x D 610 x H 380 mm
Weight	29 kg

*80 gsm paper.

Side Tray

Item	Description
Paper Capacity*	100 sheets


*70 gsm paper.

Notes


1) If the storage media of the base unit fail, loss of received data, accumulated data, registered setting data, etc. may occur. In no event shall "the company" be liable for any damages whatsoever arising from loss of data.

2) Functional spare parts will be available for at least 7 years after the product is no longer manufactured.


Dimension Drawing (Front view) (mm)

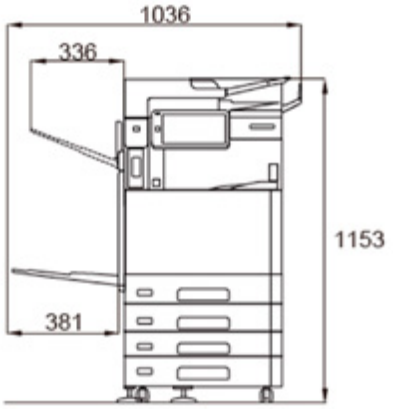


4 Tray Model
+ Side Tray

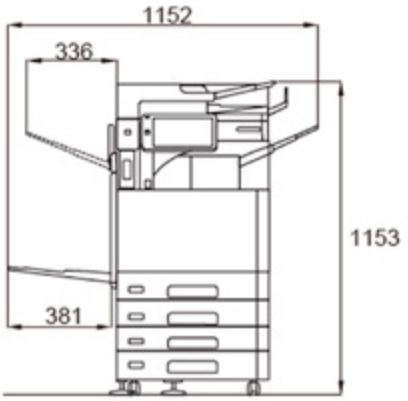


4 Tray Model
+ Finisher-A4
+ Side Tray

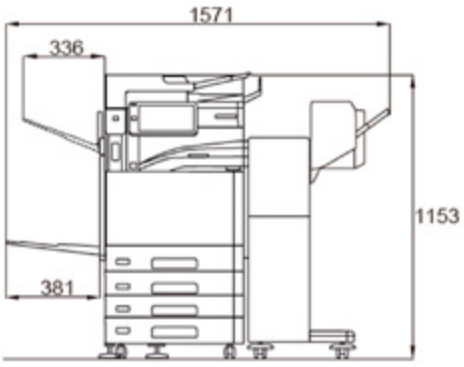

4 Tray Model
+ Finisher-B5
+ Booklet Maker Unit for Finisher-B
+ Side Tray

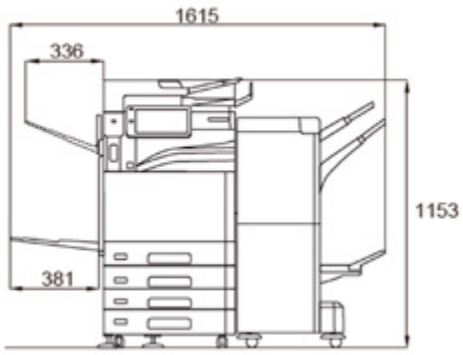


4 Tray Model
+ Finisher-C5 with Booklet Maker
+ Side Tray

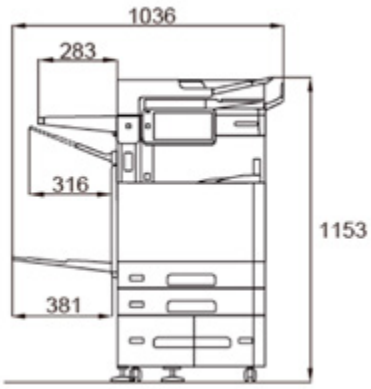


Tandem Tray Model
+ Wing Table + Side Tray

*The length is 2095mm when HCF is slide to the left side.

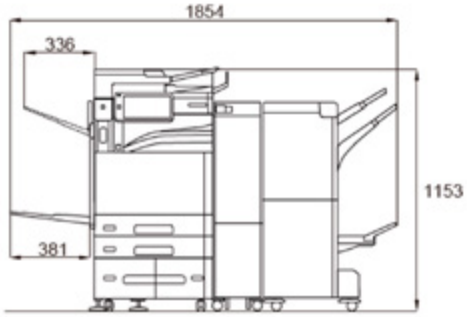


Tandem Tray Model
+ Finisher-C5 with Booklet Maker
+ Folder Unit CD3 + Side Tray

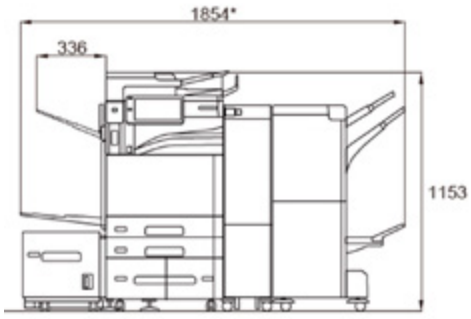


Tandem Tray Model
+ Finisher-C5 with Booklet Maker
+ Folder Unit CD3 + High Capacity Feeder B1 + Side Tray


Area Drawing (mm)

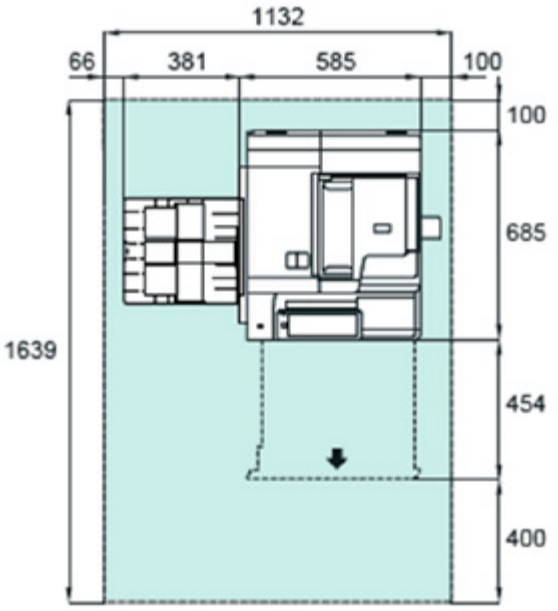


4 Tray Model
+ Side Tray

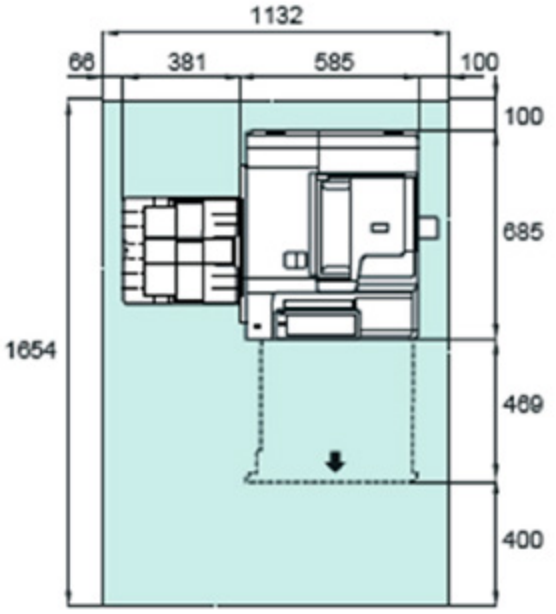

Tandem Tray Model
+ Side Tray

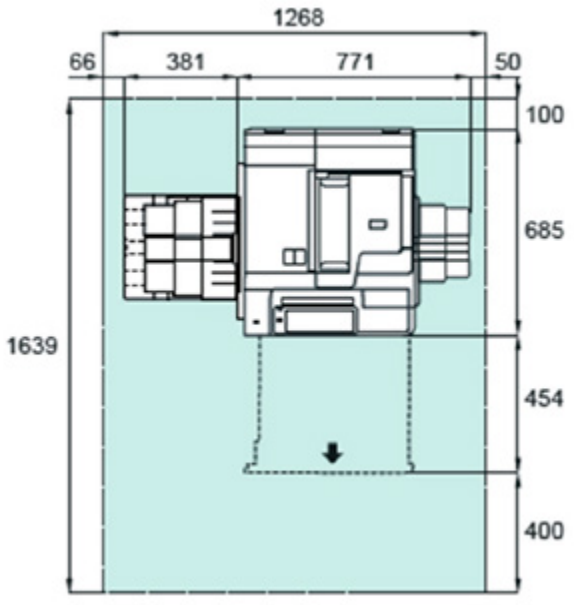


4 Tray Model
+ Finisher-A4
+ Side Tray

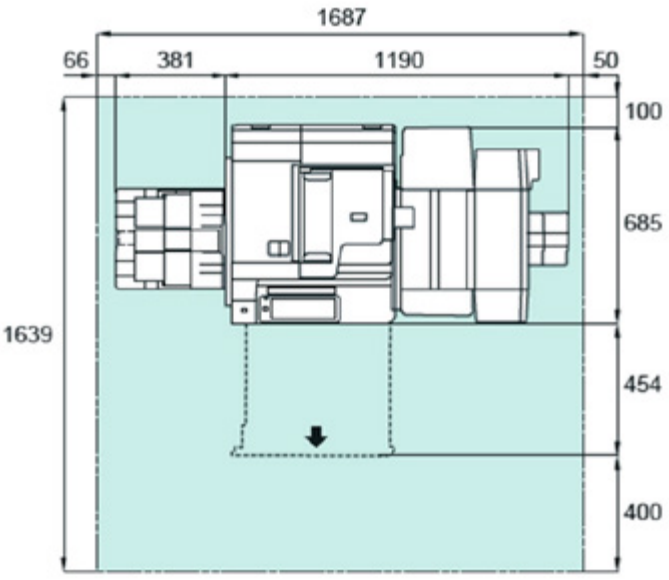


4 Tray Model
+ Finisher-B5
+ Booklet Maker Unit for Finisher-B
+ Side Tray


Area Drawing (mm)

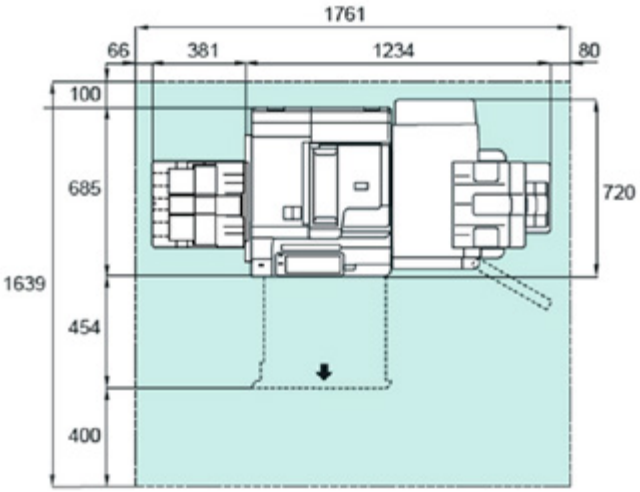

4 Tray Model
+ Finisher-C5 with Booklet Maker
+ Side Tray

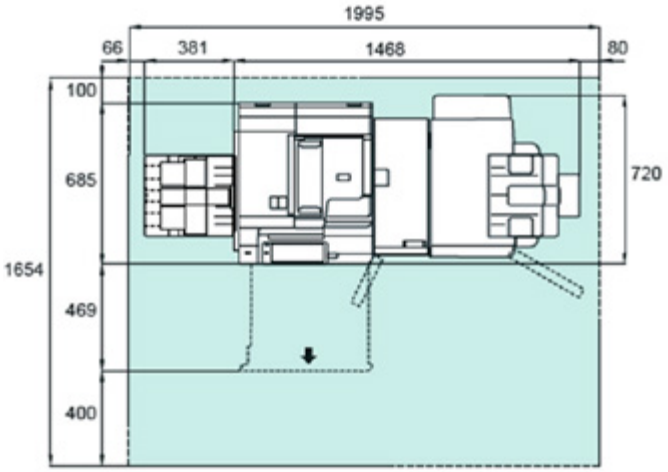

Tandem Tray Model
+ Finisher-C5 with Booklet Maker
+ Folder Unit CD3
+ High Capacity Feeder B1
+ Side Tray

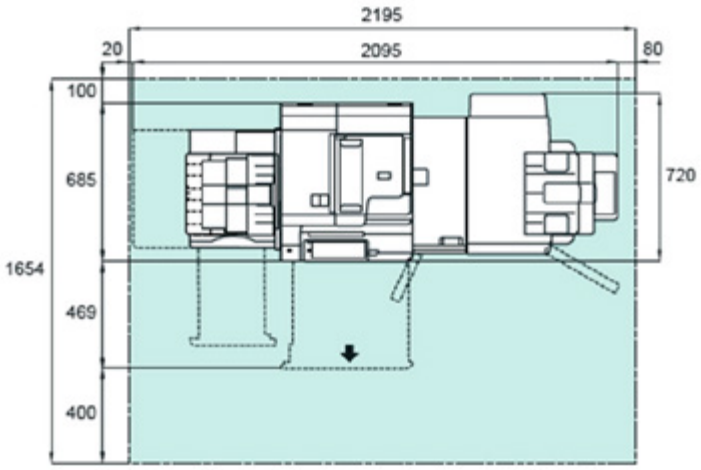

Tandem Tray Model
+ Finisher-C5 with Booklet Maker
+ Folder Unit CD3
+ Side Tray

Reliable support system

Easy solutions to resolve problems

From supplies replacement to unexpected device failures,

most problems can be resolved without waiting for the service representatives or sales representatives.

1. Resolve problem using the “Help” function on the device

- Self Help information is available on the control panel
- Self Help information can be accessed via the mobile device by scanning the QR code displayed on the control panel

2. “Remote Assistance” with the help of operators

- Connects directly to the Support Centre
- An operator will remotely access the multifunction device to resolve the problem by guiding through the steps on the shared control panel



Device Setting Backup Service

This service enables you to back up your device settings. By storing the backup data in case of any unexpected issues, you can quickly restore your device.

Note: An application is required to use this service (free of charge).

Keeping a close eye on your multifunction device on a daily basis

Connecting your multifunction printer and our EP system* via the internet allows for automatic meter count verification, automatic delivery of consumables, daily status monitoring, and automatic notifications in the event of malfunctions. This reduces the burden on multifunction printer administrators and supports the use of our products with peace of mind.

*The content of the services provided may vary depending on the usage region. For details, please contact one of our sales representative.

FUJIFILM

FUJIFILM Business Innovation Australia Pty Ltd
Level 4, 54 Waterloo Road, Macquarie Park, NSW, 2113, Australia
Tel. +61 2 9856 5000
fujifilm.com/fbau

FUJIFILM Business Innovation aims to address environmental issues through climate change mitigation and resource circulation efforts.
The available model varies depending on the country/region. Please ask the sales representatives for details.
The product specifications, appearance and other details in this brochure are subject to change without notice for improvements.

Reproduction Prohibitions Please note that reproduction of the following is prohibited by law : •Domestic and foreign currencies, government-issued securities, and national bonds and local bond certificates. •Unused postage stamps, post cards, etc. •Certificate stamps stipulated by law. •Reproducing works forming the subject matter of copyright (literary works, musical works, paintings, engravings, maps, cinematographic works, drawings, photographic works, etc.) is not permitted unless the reproduction is for the purpose of personal use, family use or other similar uses within a limited circle.

Trademarks •FUJIFILM, FUJIFILM logo and FUJIFILM IWpro are registered trademarks or trademarks of FUJIFILM Corporation.
•Apeos, Smart WelcomEyes, DocuWorks, Working Folder, and Cloud Service Hub are registered trademarks or trademarks of FUJIFILM Business Innovation Corp.
•Microsoft, Active Directory, Azure, Microsoft Entra, Microsoft Edge, Excel, OneDrive, PowerPoint, SharePoint, Microsoft Teams, Windows, and Windows Server are registered trademarks of US Microsoft Corporation in the U.S. and other countries. •Apple, Mac, macOS, OS X, AirPrint, and AirPrint logo are trademarks of Apple Inc. registered in the U.S. and other countries and regions. •Adobe, Adobe logo, PostScript, and PostScript logo are either registered trademarks or trademarks of Adobe in the United States and/or other countries. •Mopria, the Mopria Logo, and the Mopria Alliance word mark and logo are registered and/or unregistered trademarks and service marks of Mopria Alliance, Inc. in the United States and other countries. •QR Code is a registered trademark of DENSO WAVE INCORPORATED. •All product names and company names mentioned in this brochure are trademarks or registered trademarks of their respective companies.

For Your Safety
Before using the product, read the Instruction Manual carefully for proper use. Use the product with the power source and voltage specified. Be sure to establish ground connection. Otherwise, electronic shock may result in the case of a failure or short circuit.

The information is as of October, 2026. PIC-0251S AU (2610-R1)